


## Monitoring Relays

### True RMS 3-Phase, 3-Phase+N, Multifunction

#### Types DPC01, PPC01

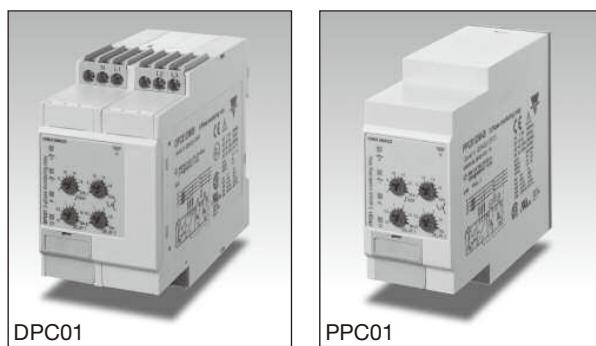

- TRMS 3-phase over and under voltage, phase sequence, phase loss, asymmetry and tolerance monitoring relay
- Detect when all 3 phases are present and have the correct sequence
- Detect if all the 3-phase-phase or phase-neutral voltages are within the set limits
- Detect if asymmetry and tolerance are within the set value
- Separately adjustable setpoints
- Separately adjustable delay functions (0.1 to 30 s)
- Output: 2 x 8 A relay SPDT NE
- For mounting on DIN-rail in accordance with DIN/EN 50 022 (DPC01) or plug-in module (PPC01)
- 45 mm Euronorm housing (DPC01) or 36 mm plug-in module (PPC01)
- LED indication for relays, alarm and power supply ON

#### Product Description

3-phase or 3-phase+neutral line voltage monitoring relay for phase sequence, phase loss, asymmetry, tolerance, over and under voltage (separately adjustable set points) with built-in time delay function. Supply ranges from 100 to 690 VAC covered by three multivoltage relays.

#### Ordering key

Housing	_____	_____
Function	_____	_____
Type	_____	_____
Item number	_____	_____
Output	_____	_____
Power Supply	_____	_____

**DPC 01 D M48**

#### Type Selection

Mounting	Output	Frequency	Supply: 100 to 115 VAC	Supply: 208 to 240 VAC	Supply: 380 to 415 VAC
DIN-rail	2 x SPDT	50 - 60 Hz	DPC 01 D M11 400HZ	DPC 01 D M23	DPC 01 D M48 400HZ
DIN-rail	2 x SPDT	50 - 400 Hz		DPC 01 D M23 400HZ	PPC 01 D M23
Plug-in	2 x SPDT	50 - 60 Hz			PPC 01 D M48
Mounting	Output	Frequency	Supply: 440 to 480 VAC	Supply: 380 to 480 VAC	Supply: 600 to 690 VAC
DIN-rail	2 x SPDT	50 - 60 Hz	DPC 01 D M49 400HZ	DPC 01 D M48	DPC 01 D M69
DIN-rail	2 x SPDT	50 - 400 Hz			DPC 01 D M69 400HZ

#### Input Specifications

Input		Ranges	
L1, L2, L3, N	DPC01: PPC01:	Terminals L1, L2, L3, N Terminals 5, 6, 7, 11 Measure their own supply	+2 to +22% of the nominal voltage -22 to -2% of the nominal voltage
Note: Connect the neutral only if it is intrinsically at the star centre			2 to 22% of the nominal voltage 2 to 22% of the nominal voltage
Measuring ranges		Tolerance	
M11	DPC01	85 to 132 ΔVAC	2 to 22% of the nominal voltage
M23	DPC01 400HZ	177 to 275 ΔVAC	
M48	PPC01	323 to 550 ΔVAC	
	DPC01	323 to 475 ΔVAC	
M49	DPC01	323 to 475 ΔVAC	
M69	DPC01	375 to 550 ΔVAC	
	DPC01	510 to 793 ΔVAC	
		Note:	The input voltage must not exceed the maximum rated voltage or drop below the minimum rated voltage reported above.
		Hysteresis	Set points from 2 to 5% Set points from 5 to 22%
			1% 2%

## Output Specifications

<b>Output</b>	2 x SPDT relays N.E.
Rated insulation voltage	250 VAC
<b>Contact ratings (AgSnO<sub>2</sub>)</b>	μ
Resistive loads	8 A @ 250 VAC 5 A @ 24 VDC
Small inductive loads	AC 15 DC 13 2.5 A @ 250 VAC 2.5 A @ 24 VDC
<b>Mechanical life</b>	≥ 30 x 10 <sup>6</sup> operations
<b>Electrical life</b>	≥ 10 <sup>5</sup> operations (at 8 A, 250 V, cos φ = 1)
<b>Operating frequency</b>	≤ 7200 operations/h

### Dielectric strength

Dielectric voltage  
Rated impulse withstand volt.

≥ 2 kVAC (rms)  
4 kV (1.2/50 μs)

## Supply Specifications

<b>Power supply</b>	Overvoltage cat. III (IEC 60664, IEC 60038)
Rated operational voltage through terminals:	
L1, L2, L3, N (DPC01) 5, 6, 7, 11 (PPC01)	100 to 115VAC ±15%; 45 to 65Hz
M11 - Delta Voltage: M23 - Delta Voltage:	208 to 240VAC ±15%; 45 to 65Hz
DPC01 M48 - Delta Voltage: DPC01 M48 - Star Voltage:	380 to 480VAC ±15%; 45 to 65Hz
PPC01 M48 - Delta Voltage: PPC01 M48 - Star Voltage:	220 to 277VAC ±15%; 45 to 65Hz
M48 400HZ - Delta Voltage: M48 400 HZ- Star Voltage:	380 to 415VAC ±15%; 45 to 65Hz
M49 400HZ - Delta Voltage: M49 400 HZ- Star Voltage:	220 to 240VAC ±15%; 45 to 440Hz
M69 - Delta Voltage: M69 - Star Voltage:	440 to 480VAC ±15%; 45 to 440Hz
M69 400HZ- Delta Voltage: M69 400HZ- Star Voltage:	254 to 277VAC ±15%; 45 to 440Hz
M69 - Delta Voltage: M69 - Star Voltage:	600 to 690VAC ±15%; 45 to 65Hz
M69 400HZ- Delta Voltage: M69 400HZ- Star Voltage:	347 to 400VAC ±15%; 45 to 65Hz
M69 - Delta Voltage: M69 - Star Voltage:	600 to 690VAC ±15%; 45 to 440Hz
M69 400HZ- Delta Voltage: M69 400HZ- Star Voltage:	347 to 400VAC ±15%; 45 to 440Hz
<b>Rated operational power</b>	
M11	8 VA @ Δ115 VAC, 50 Hz
M23	9 VA @ Δ230 VAC, 50 Hz
M48	13 VA @ Δ400 VAC, 50 Hz
M69	21 VA @ Δ600 VAC, 50 Hz
	Supplied by L2 and L3 for the DIN-rail versions and by L1 and L2 for the Plug-in versions

## General Specifications

<b>Power ON delay</b>	1 s ± 0.5 s or 6 s ± 0.5 s	<b>Housing</b>	
<b>Accuracy</b>	(15 min warm-up time)	Dimensions	DPC01 PPC01
Temperature drift	± 1000 ppm/°C		45 x 80 x 99.5 mm 36 x 80 x 94 mm
Delay ON alarm	± 10% on set value ± 50 ms	<b>Weight</b>	Approx. 220 g
Repeatability	± 0.5% on full-scale	<b>Screw terminals</b>	(DPC01) Tightening torque Max. 0.5 Nm acc. to IEC 60947
<b>Reaction time</b>		<b>Approvals</b>	UL, CSA GL (DPC01 only, except 400Hz, M11)
Incorrect phase sequence or total phase loss	< 200 ms (input signal variation from -20% to +20% or from +20% to -20% of set value)	<b>CE Marking</b>	Yes
Voltage level		<b>EMC</b>	Electromagnetic Compatibility According to EN 61000-6-2 Immunity Emissions According to EN 61000-6-3
Asymmetry level			
Alarm ON delay:	< 200 ms (delay < 0.1 s)		
Alarm OFF delay:	< 200 ms (delay < 0.1 s)		
<b>Indication for</b>			
Power supply ON	LED, green		
Alarm ON	LED, red (flashing 2 Hz during delay time)		
Output relays ON	2 x LED, yellow		
<b>Environment</b>	(EN 60529)		
Degree of protection	IP 20		
Pollution degree	3 (DPC01), 2 (PPC01)		
Operating temperature	-20 to +60°C, R.H. < 95%		
@ Max. voltage, 50 Hz	-20 to +50°C, R.H. < 95%		
@ Max. voltage, 60 Hz	-30 to +80°C, R.H. < 95%		
Storage temperature			

## Mode of Operation

### Asymmetry definition.

Asymmetry is an indicator of the mains quality and it is defined as the absolute value of the maximum deviation among the mains voltages, divided by the nominal voltage of the 3-phase system. The definition changes according to the voltage reference:

- 1) in case of measuring phase-phase voltages:

$$\frac{\max |\Delta V_{\text{PH-PH}}|}{V_{\Delta \text{NOM}}} \times 100$$

- 2) in case of measuring phase-neutral voltages:

$$\frac{\max |\Delta V_{\text{PH-N}}|}{V_{\Delta \text{NOM}}} \times 100$$

### Tolerance definition.

Tolerance is another indicator of the mains quality and it is defined as the absolute value of the maximum deviation of the mains voltages from the nominal voltage, divided by the nominal voltage of the 3-phase system. The definition changes according to the voltage reference:

- 1) in case of measuring phase-phase voltages:

$$\frac{\max |V_{\Delta \text{NOM}} - V_{\text{PH-PH}}|}{V_{\Delta \text{NOM}}} \times 100$$

- 2) in case of measuring phase-neutral voltages:

$$\frac{\max |V_{\Delta \text{NOM}} - V_{\text{PH-N}}|}{V_{\Delta \text{NOM}}} \times 100$$

Connected to the 3 phases (and neutral) DPC01 and PPC01 operate when all 3 phases are present at the same time and the phase sequence is correct. It can be decided whether to monitor upper and lower voltage level of each phase or their asymmetry and tolerance.

### Example 1


(Mains monitoring - over and under phase-phase voltage)  
The relay monitors over and under voltage, phase loss and correct phase sequence.

### Example 2


(Motor monitoring - starting and operating load -asymmetry and tolerance of phase-neutral voltage)  
DPC01 and PPC01 ensure correct starting and operating conditions. They monitor the voltage level, phase sequence (correct direction of the motor rotation) and asymmetry.

Frequent failures are fuse blowing and incorrect voltage level. In case of fuse blowing the motor regenerates a voltage in the interrupted phase. The relay detects the failure and reacts due to excessive imbalance among the phases.

### Example: phase-neutral monitoring

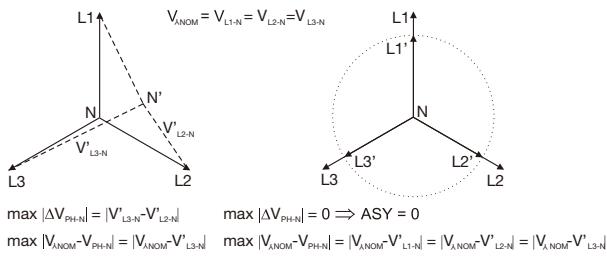

### Example: phase-phase monitoring

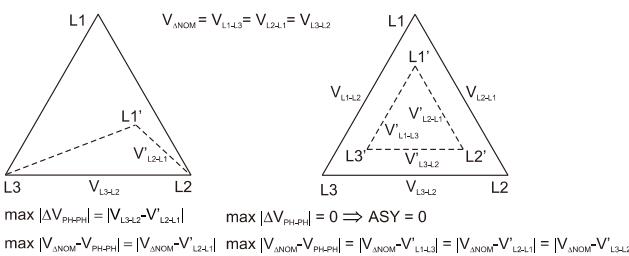

### Asymmetry and tolerance monitoring:

If one or more phase-phase or phase-neutral voltage exceed the set levels the red LED starts flashing 2 Hz and the respective output relay releases after the set time period.

Note: For both functions, if the phase sequence is wrong or one phase is lost, both output relays release immediately. Only 200 ms delay occurs. The failure is indicated by the red LED flashing 5 Hz during the alarm condition.

## Function/Range/Level/Time Setting

Adjust the input range setting the DIP-switches 3 and 4. Select the desired function setting the DIP-switches 5 and 6 as shown below. To

access the DIP-switches open the plastic cover using a screwdriver as shown below.


### Centre knobs:

Setting of upper (↑) and lower (↓) level or setting of asymmetry (ASY) and tolerance (⌚) on relative scale.


### Lower knobs:

Setting of delay on alarm times (DELAY 1, DELAY 2) on absolute scale:  
0.1 to 30 s.


DPC01




PPC01



DPC01 400 Hz




## Function/Range/Level/Time Setting (cont.)

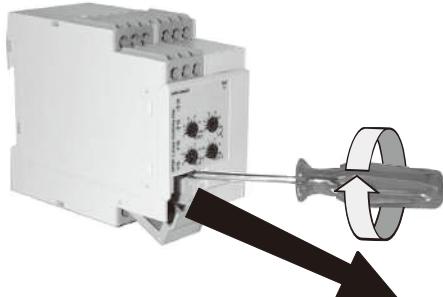

<b>Power-ON delay</b>
ON: 6 s ± 0.5 s
OFF: 1 s ± 0.5 s
<b>Monitoring</b>
ON: Phase-Neutral voltages
OFF: Phase-Phase voltages
<b>Measuring range</b>
SW3      ON      ON      OFF      OFF
SW4      ON      OFF      ON      OFF
M11 Ph-Ph Voltage      100 VAC      100 VAC      115 VAC      115 VAC
M23 Ph-Ph Voltage      208 VAC      220 VAC      230 VAC      240 VAC
M48 Ph-Ph Voltage      380 VAC      400 VAC      415 VAC      480 VAC DPC01 only
M48 Ph-N Voltage      220 VAC      230 VAC      240 VAC      277 VAC DPC01 only
M49 Ph-Ph Voltage      440 VAC      440 VAC      480 VAC      480 VAC
M49 Ph-N Voltage      254 VAC      254 VAC      277 VAC      277 VAC
DPC01DM69 Ph-Ph Volt.      600 VAC      600 VAC      690 VAC      690 VAC
DPC01DM69 Ph-N Volt.      347 VAC      347 VAC      400 VAC      400 VAC
<b>Output</b>
ON: 2 x SPDT relays
OFF: 1 x DPDT relay
<b>Function</b>
ON: Asymmetry and tolerance monitoring
OFF: Over and undervoltage monitoring



## Operation Diagrams

Over and undervoltage monitoring (2 x SPDT relays)

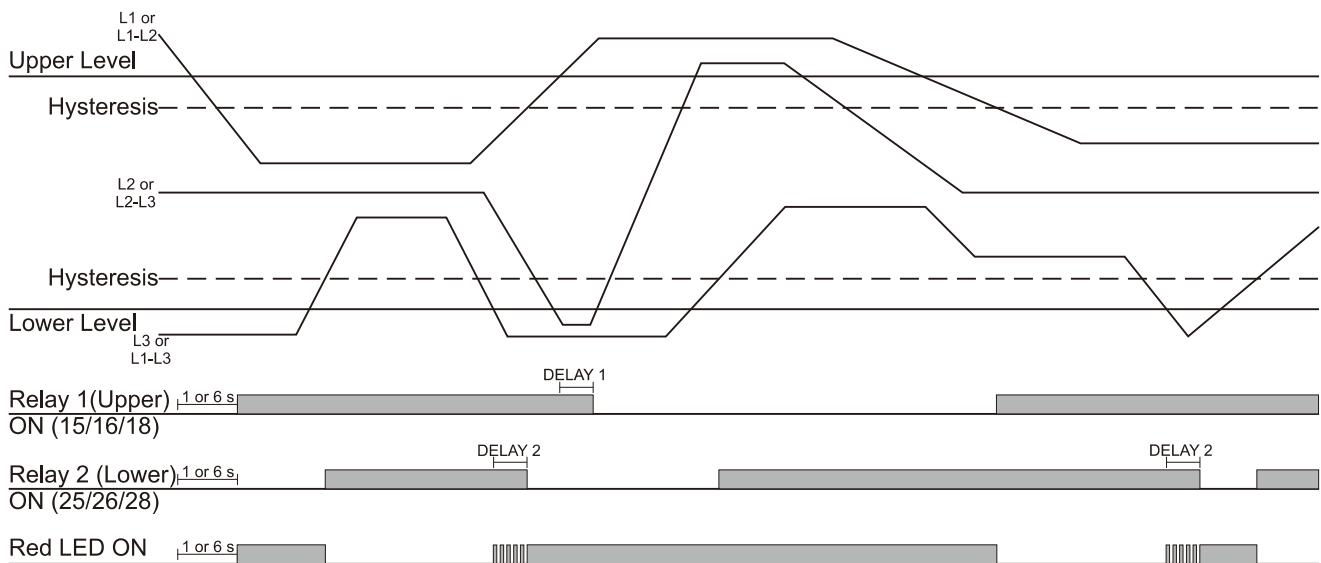


## Operation Diagrams (cont.)

Asymmetry and tolerance monitoring (2 x SPDT relays)

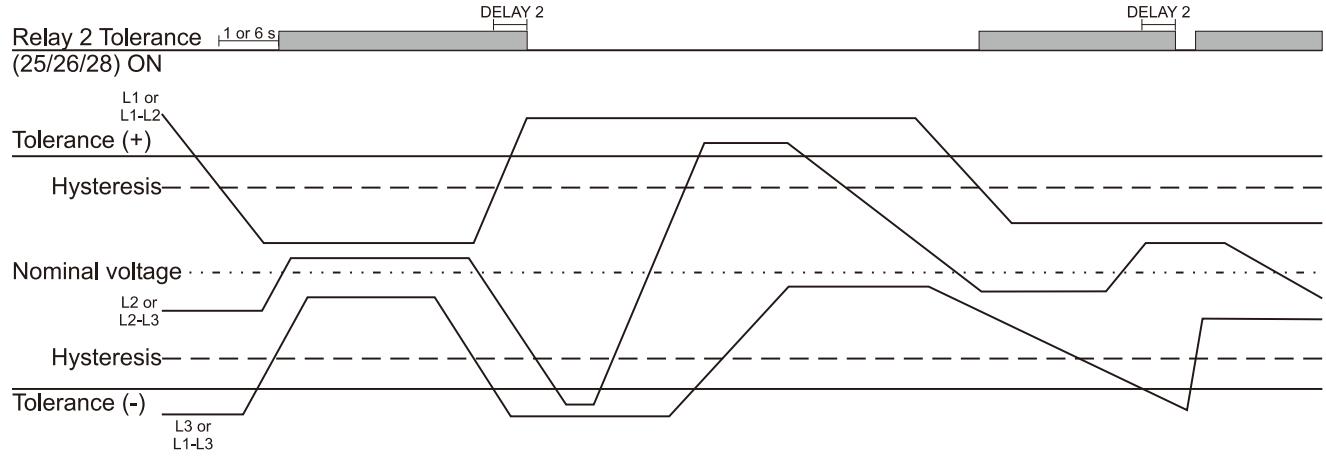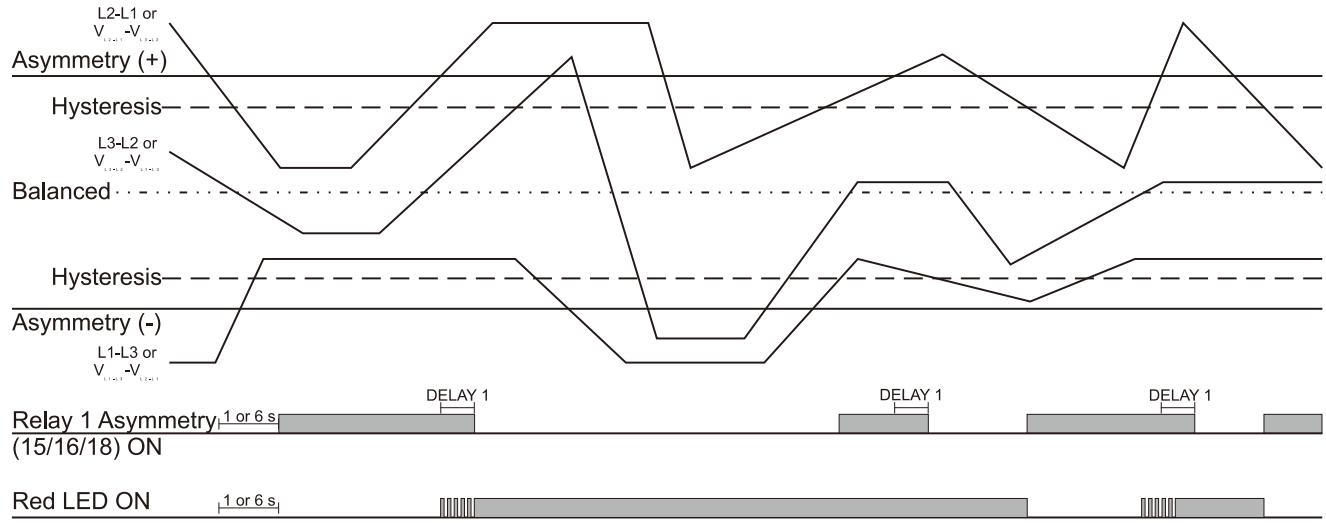


Phase sequence, total phase loss

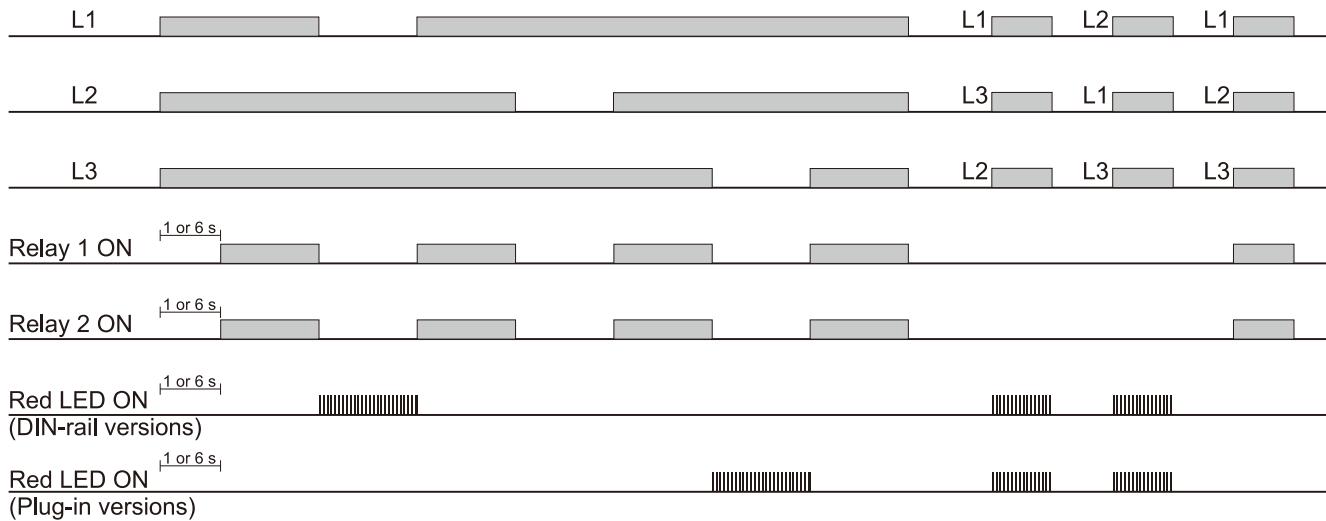


## Wiring Diagrams

Ex.1

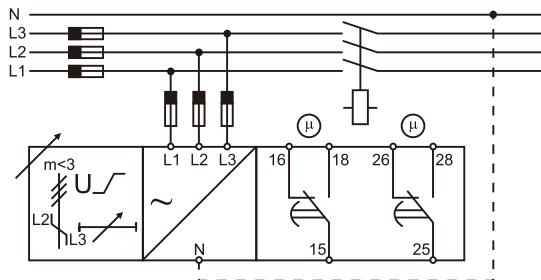


Ex.2

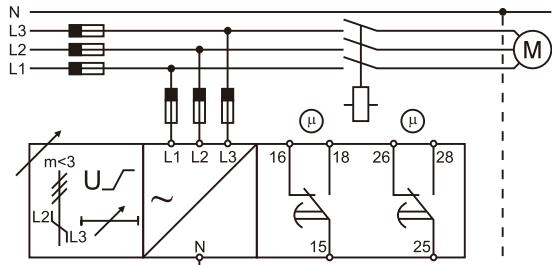


DPC01

Ex.1

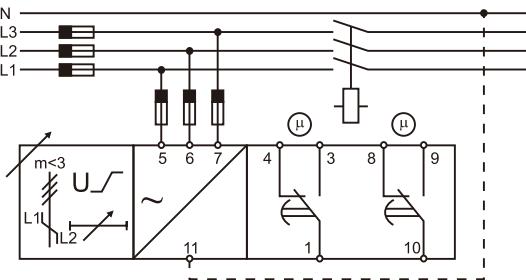


Ex.2

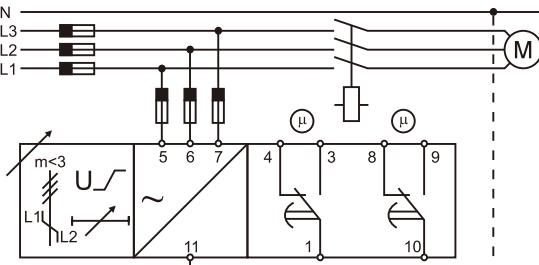

PPC01

## Dimensions

DIN-rail

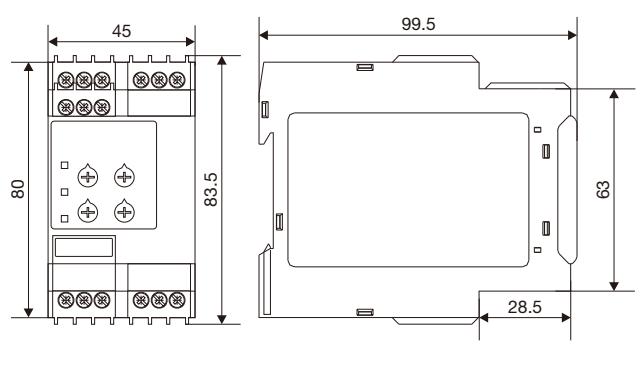

Plug-in

