


THE NEW SANTON X-TYPE SWITCH

TECHNICAL SPECIFICATIONS AND INSTRUCTIONS FOR USE

SANTON X-TYPE SWITCH: X60.32RKS1G-(O)-G-30.32.2

Switch disconnecter for solar application according to
UL 508, CSA C22.2 No. 0 – M91, - CSA C22.2 No. 14 – 05




Contact scheme		Positions			
Marking	Symbol	Marking	1	2	3 4
12	— / —				
11	— / —				
10	— / —				
9	— / —				
8	— / —				
7	— / —				
6	— / —				
5	D — / —	C			X
4	B — / —	A			X
3	empty				
2	— / —	1			X
1	— / —	1			X



Contacts are made in "X" marked position.

Symbols for connections between contacts: []

Technical data	Symbol	32RKS1G-(O)-G-30.32.2	Unit
nominal voltage	U	600	V
nominal current	I	32	A
method of mounting	reverse single hole mounting IP65 [R] terminals access from bottom side		
number of poles	DC single pole switching 1		
utilization category	Photovoltaic disconnect switch		
actuator	without a knob, knob with padlocking, for single		
method of operation	independent manual operation		
positions	ON at 12 hr, OFF at 3 hr [G]		
rated impulse withstand voltage		8	kV
insulation voltage		600	V
rated thermal current uninterrupted duty		32	A
rated short-time withstand current (1s)		960	A
suitable for use on a circuit capable of delivery not more than 5.000 rms symmetrical			
Amperes, 600 Vdc max, when protected by class H fuses:			
		40	A max.
max power dissipation		6,6	W
minimum required dimensions of enclosures l x w x h*		124 x 47 x 80,5	mm
* see the drawing for the height of the switch. The number of layers is	H	5	
tightening torque terminal screws M4, min. - max.	1,5	1,7	Nm
	13	15	Lb.In
wire size, "Copper Wire Only", minimum required fine wire cross-section		6	mm ²
		10	AWG
tightening torque panel mounting nut, min. - max.	2	2,5	Nm
	18	22	Lb.In
tightening torque M3 screw in the standard black knob, min. - max.	0,5	0,7	Nm
	5	6	Lb.In
ambient temperature allowed between		- 5 and + 40	°C
storage temperature allowed between		- 40 and + 80	°C
maximum relative humidity, without condensation at 20 °C		90	%
watertight gland, class			
nominal voltage AC	U	300	V AC
nominal current AC	I	32	A AC
number of poles AC		2	
auxiliary contact, nominal current 16A at 250 V, AC15	No auxiliary contact		
weight		254	g
accessoires:		0	



H is the number of layers in the switch

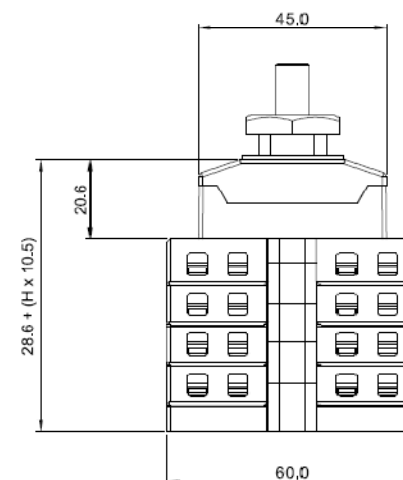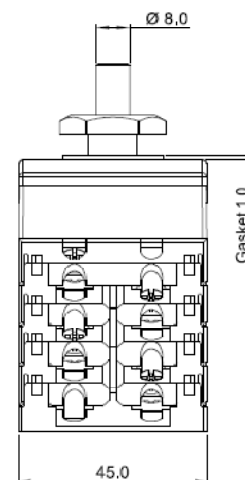

Mounting instructions

In the application all ratings have to be respected. When building the switch in an enclosure, the space envelope must be respected. The terminals, without interconnection can take copper wires up to 6 mm². The recommended Spade Tongue Terminals may have a maximum width of 9 mm. For CSA and UL applications, registered Spade Tongue Terminals must be used. The registration numbers are UL: E13288 and CSA: LR7189 (for instance type 165015 from Tyco). After mounting, the wiring must be checked and the switch must operate smoothly.

Maintenance

The X type switches are designed for a very long life but they need some simple yearly maintenance.

- Check the installation for signs of overload or overheating. The terminals may not exceed the limit of 85°C under full load.
- By operating the switch a few times (5x) the contacts will clean themselves and the switch will have a longer life.

Dimensions, specifications and data shown could be subject to change without notice.