



Energy Management Energy Analyzer Type ENA15 96



- 3 digital outputs for pulses or for alarms or as a mix of them (on request)
- Front dimensions: 96x96mm
- Protection degree (front): IP50
- RS485 serial output (on request) (MODBUS-RTU), iFIX SCADA compatibility
- Application adaptable display and programming procedure (Easyprog function)
- Easy connections management
- MID "annex MI-003" (Measuring Instruments Directive) compliant


- Class 1 (kWh) according to EN62053-21
- Class 2 (kvarh) according to EN62053-23
- Accuracy $\pm 0.5\%$ RDG (current/voltage)
- Dual colour backlight: no backlight, blue or white (selectable)
- Energy analyzer
- Instantaneous variables readout: 4 DGT
- Energies/gas/water readout: 7+1 DGT
- System variables: VLL, VLN, Admd, VA, VAdmd, VAdmd max, W, Wdmd, Wdmd max, var, PF, Hz, Phase-sequence.
- Single phase variables: VLL, VLN, A, VA, W, var, PF
- Energy measurements: total and partial kWh and kvarh or based on 4 different tariffs; single phase measurements
- Gas, cold water, hot water, kWh remote heating measurements
- Hour counter (6+2 DGT)
- Harmonic analysis (FFT) up to 15th harmonic (current/voltage)
- TRMS measurements of distorted sine waves (voltages/currents)
- Universal power supply: 18 to 60VAC/DC, 90 to 260AC/VDC
- 3 digital inputs for tariff selection, DMD synch or gas/water (hot-cold) and remote heating metering (on request)

Product Description

Three-phase energy analyzer with built-in configuration joystick and LCD data displaying; particularly indicated for active and reactive energy metering and for cost allocation. Housing for panel mounting with IP50 (front) protection degree. External Current and potential trans-

formers connection. Moreover the meter can be provided with digital outputs that can be either for pulse proportional to the active and reactive energy being measured for alarm outputs, RS485 communication port and 3 digital inputs are available as an option.

How to order ENA15 96 AV5 3 H O3 S1 XX

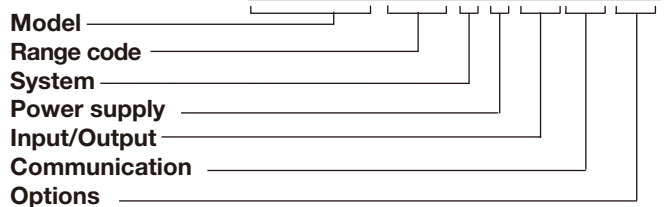

Type Selection

| Range codes | System | Power supply | Input/Output |
|--|--|--|---|
| AV5: 400/690V _{LL} AC 1/5(10)A (*) V _{LN} : 160 V to 480 V _{LN} V _{LL} : 277 V to 830 V _{LL} | 1: 1-phase., 2-wire; 3-phase, 3-wire, balanced load (**) | H: 90 to 260VAC/DC (48 to 62Hz) (*) L: 18 to 60VAC/DC (48 to 62Hz) (**) | XX: none (*) O1: single open collector type (pulse or alarm) (**) O3: 3 open collector type (mixed combination of pulse and/or alarm out- puts) (*) |
| AV6: 120/208V _{LL} AC 1/5(10)A (*) V _{LN} : 40 V to 144 V _{LN} V _{LL} : 70 V to 250 V _{LL} | 3: balanced and unbalanced load: 3-phase, 4-wire; 3-phase, 3-wire; 2-phase, 3-wire; 1-phase, 2-wire (*) | | R2: dual relay type (func- tions as per "O3") (*) I3: 3 digital inputs for tariff selection or Gas / water / remote heating metering (***) |
| | Communication | Options | |
| | XX: none (*) S1: RS485 port (*) | XX: none (*) | |

(*) as standard.
(**) on request.
(***) in case of "I3" option selection it includes always the "S1" option (RS485). The final code becomes "I3S1".



Input specifications

| | | | |
|--|--|--|--|
| Rated inputs Current type | System type: 3 Galvanic insulation by means of built-in CT's AV5 and AV6: 1/5(10)A | Display | 3 lines (1 x 8 DGT; 2 x 4 DGT) |
| Current range (by CT) Voltage by direct connection or VT/PT | AV5: 230/400VLL; AV6: 120/208VLL | Type | LCD, h 9.5mm, dual colour backlight (selectable) |
| Accuracy (Display + RS485) (@25°C ±5°C, R.H. ≤60%, 48 to 62Hz) | lb: see below, Un: see below | Instantaneous variables read-out Energies | 4 DGT Imported: Total/Partial/Tariff: 7+1DGT or 8DGT; Exported: Total/Partial/Tariff: 6+1DGT or 7DGT (with “-“ sign). |
| AV5 model | In: 5A, Imax: 10A; Un: 160 to 480VLN (277 to 830VLL) | Overload status | EEEE indication when the value being measured is exceeding the “Continuous inputs overload” (maximum measurement capacity) |
| AV6 model | In: 5A, Imax: 10A; Un: 40 to 144VLN (70 to 250VLL) | Max. and Min. indication | Max. instantaneous variables: 9999; energies: 9 999 999.9 or 99 999 999. Min. instantaneous variables: 0; energies 0.0 or 0 |
| Current AV5, AV6 models | From 0.002In to 0.2In: ±(0.5% RDG +3DGT) From 0.2In to Imax: ±(0.5% RDG +1DGT). In the range Un: ±(0,5% RDG +1DGT) | LEDs | Red LED (Energy consumption), 1000 imp./kWh/kvarh. Max frequency: 16Hz according to EN62052-11 |
| Phase-neutral voltage | In the range Un: ±(0,5% RDG +1DGT) | Measurements | See “List of the variables that can be connected to:” |
| Phase-phase voltage | In the range Un: ±(1% RDG +1DGT) | Method | TRMS measurements of distorted wave forms. |
| Frequency | ±0.1Hz (45 to 65Hz) | Coupling type | By means of external CT's |
| Active and Apparent power Power Factor | ±(1%RDG +2DGT) ±[0.001+1%(1.000 - “PF RDG”)] | Crest factor | ≤3 (15A max. peak) |
| Reactive power Energies | ±(2%RDG +2DGT) Class 1 according to EN62053-21 and MID Annex MI-003 Class B Class 2 according to EN62053-23 | Current Overloads | |
| AV5, AV6 models | In: 5A, Imax: 10A; 0.1 In: 0.5A. Start up current: 10mA | Continuous | 10A, @ 50Hz |
| Harmonic distortion | ±3% F.S. (up to 15th harmonic) (F.S.: 100%) | For 500ms | 200A, @ 50Hz |
| Energy additional errors Influence quantities | According to EN62053-21, EN62053-23 | Voltage Overloads | |
| Temperature drift | ≤200ppm/°C | Continuous | 1.2 Un |
| Sampling rate | 1600 samples/s @ 50Hz 1900 samples/s @ 60Hz | For 500ms | 2 Un |
| Display refresh time | 750 msec | Input impedance | |
| | | 208VL-L (AV6) | >1MΩ |
| | | 400VL-L (AV5) | >1MΩ |
| | | 1/5(10) A (AV5-AV6) | < 0.3VA |
| | | Frequency | 45 to 65 Hz |
| | | Joystick | For variable selection: programming of the instrument working parameters and Wdmd max reset |



Output specifications

| | | | |
|--|---|---|---|
| Digital outputs Pulse type Number of outputs Type Pulse duration Alarm type Number of outputs Alarm modes Set-point adjustment Hysteresis On-time delay Output status Min. response time Note | Up to 3, independent. Programmable from 0.01 to 1000 pulses per kWh/kvarh. Outputs connectable to the energy meters (Wh/varh) $\geq 100\text{ms} < 120\text{msec}$ (ON), $\geq 120\text{ms}$ (OFF), according to EN62052-31 Up to 3, independent Up alarm, down alarm (see the table "List of the variables that can be connected to") From 0 to 100% of the display scale From 0 to full scale 0 to 255s Selectable: normally de-energized or normally energized $\leq 700\text{ms}$, filters excluded. Set-point on-time delay: "0 s" The 3 digital outputs can also work as a triple pulse output, triple alarm output, or in any other combination. | Relay output Physical outputs Purpose Type Insulation <hr/> RS485 Type Connections Addresses Protocol Data (bidirectional) Dynamic (reading only) Static (reading and writing) Data format Baud-rate Driver input capability Insulation | Max. 2 For alarm output, pulse output or remote control. Reed Relay, SPST type AC 1-5A @ 250VAC DC 12-5A @ 24VDC AC 15-1.5A @ 250VAC DC 13-1.5A @ 24VDC 4000 VRMS outputs to measuring input. 4000 VRMS outputs to power supply input. Multidrop, bidirectional (static and dynamic variables) 2-wire Max. distance 1000m Termination directly on the instrument 247, selectable by means of the front joystick MODBUS/JBUS (RTU) System and phase variables: see table "List of variables..." All the configuration parameters. 1 start bit, 8 data bit, no parity, 1 stop bit 4800, 9600 bits/s 1/5 unit load Maximum 160 transceivers on the same bus. By means of optocouplers, 4000 VRMS output to measuring input. 4000 VRMS output to power supply input |
| Static output Physical outputs Purpose Signal Insulation | Max. 3 For pulse output, alarm output or remote control. V_{ON} 1.2 VDC/ max. 100 mA V_{OFF} 30 VDC max. By means of optocouplers, 4000 VRMS output to measuring inputs, 4000 VRMS output to power supply input. | | |



Digital input specifications

| | | | |
|---------------------------|--|------------|---|
| Number of inputs | 3 | | |
| Input frequency | 20Hz max, duty cycle 50% | | |
| Prescaler adjustment | From 0,1 to 999,9 m ³ or kWh/pulse | | |
| Contact measuring voltage | 5VDC +/- 5% | | |
| Contact measuring current | 10mA max | | |
| Input impedance | 680Ω | | |
| Contact resistance | ≤100Ω, closed contact ≥500kΩ, open contact | | |
| Working modes | Selectable: <ul style="list-style-type: none"> • total and partial energy meters (kWh and kvarh) without digital inputs; • total and partial energy meters (kWh and kvarh) managed by time periods (t1-t2-t3-t4), W dmd synchronisation (the synchronisation is made every time the tariff changes) and GAS (m³) or WATER (hot-cold m³) or remote heating (kWh) meters; | Note | <ul style="list-style-type: none"> • total and partial energy meters (kWh and kvarh) managed by time periods (t1-t2), W dmd synchronisation (the synchronisation is made independently of the tariff selection) and GAS (m³) or WATER (hot-cold m³) or remote heating (kWh) meters; • total energy (kWh, kvarh) and GAS, WATER (hot-cold m³) and remote heating meters (3 choices only). The energy metering is only made by means of the analogue inputs. By means of optocouplers, 4000 VRMS digital inputs to measuring inputs. 4000 VRMS digital inputs to power supply input. |
| | | Insulation | |

Software functions

| | | | |
|-------------------------------|---|------------------------|---|
| Password | Numeric code of max. 4 digits; 2 protection levels of the programming data: Password "0", no protection; | | |
| 1st level | Password "0", no protection; | | |
| 2nd level | Password from 1 to 9999, all data are protected | | |
| System selection | | | |
| System 3-Ph.n unbalanced load | 3-phase (4-wire); 3-phase (3-wire). | | |
| System 3-Ph.1 balanced load | 3-phase (3-wire) one current and 3-phase to phase voltage measurements. 3-phase (4-wire) one current and 3-phase to neutral voltage measurements. 3-phase (2-wire) one current and one-phase (L1) to neutral voltage measurement. | | |
| System 2-Ph | 2-phase (3-wire). | | |
| System 1-Ph | 1-phase (2-wire). | | |
| Transformer ratio | | | |
| VT (PT) | 1.0 to 999.9 / 1000 to 6000. | | |
| CT | 1.0 to 999.9 / 1000 to 9999 / 10.00k to 60.00k. The maximum power being measured cannot exceed 210 MW (calculated as maximum input voltage and current, see the "Accuracy" paragraph (on page 2). The maximum VT | | |
| | | Filter | by CT ratio is 48600. If the currents and/or voltages being measured exceed their maximum limits, the display shows the error message "EEEE". For MID compliant applications the maximum power being measured is 25 MW. |
| | | Operating range | 0 to 100% of the input display scale |
| | | Filtering coefficient | 1 to 32 |
| | | Filter action | Measurements, serial output (fundamental variables: V, A, W and their derived ones). |
| | | Displaying | Up to 3 variables per page See « Display pages » 8 different set of variables available (see « Display pages ») according to the application being selected |
| | | Alarm highlight | In case of alarm and if the relevant function is enabled, the display changes the colour alternatively from white backlight to blue backlight and vice versa. |
| | | Reset | By means of the front joystick: - dmd and max. dmd; - total energies and |



Software functions (cont.)

| | | |
|---------------------------------|--|---|
| | gas/water: kWh, kvarh; - partial energies and tariffs: kWh, kvarh | energy is always “imported” with the only exception of “F” and “H” types (see “display pages” table). For these latter selections the energies can be either “imported” or “exported” depending on the current direction. |
| Harmonic analysis | Up to the 15th harmonics on single current and voltage | |
| Easy connection function | For all the display selections, both energy and power measurements are independent of the current direction. The displayed | |

General specifications

| | | | |
|----------------------------------|---|------------------------------------|---|
| Operating temperature | -25°C to +55°C (-13°F to 131°F) (R.H. from 0 to 90% non-condensing @ 40°C) according to EN62053-21 and EN62053-23 | Immunity to conducted disturbances | 4kV |
| Storage temperature | -30°C to +70°C (-22°F to 140°F) (R.H. < 90% non-condensing @ 40°C) according to EN62053-21 and EN62053-23 | Surge | 10V/m from 150KHz to 80MHz On current and voltage measuring inputs circuit: 4kV; on “L” auxiliary power supply input: 1kV; According to CISPR 22 |
| Installation category | Cat. III (IEC60664, EN60664) | Radio frequency suppression | |
| Insulation (for 1 minute) | 4000 VRMS between measuring inputs and power supply. 4000 VRMS between power supply and RS485 digital outputs | Standard compliance | |
| Dielectric strength | 4000 VRMS for 1 minute | Safety | IEC60664, IEC61010-1 EN60664, EN61010-1 EN62052-11 EN62053-21, EN62053-23. MID “annex MI-003” DIN43864, IEC62053-31 CE, UL |
| Noise rejection CMRR | 100 dB, 48 to 62 Hz | Metrology | |
| EMC | According to EN62052-11 | Pulse output Approvals | |
| Electrostatic discharges | 15kV air discharge; | Connections | Screw-type |
| Immunity to irradiated | Test with current: 10V/m from 80 to 2000MHz; | Cable cross-section area | Max. 1.5 mm ² |
| Electromagnetic fields | Test without any current: 30V/m from 80 to 2000MHz; | Housing | |
| Burst | On current and voltage measuring inputs circuit: | Dimensions (WxHxD) | 96 x 96 x 63 mm |
| | | Material | ABS, self-extinguishing: UL 94 V-0 |
| | | Mounting | Panel mounting |
| | | Protection degree | |
| | | Front | IP50 |
| | | Screw terminals | IP20 |
| | | Weight | Approx. 400 g (packing included) |


Power supply specifications

| | | | |
|------------------------|---|-------------------|----------------------|
| Auxiliary power supply | L: 18 to 60VAC/DC; H: 90 to 260VAC/DC (48 to 62Hz) | Power consumption | AC: 6VA DC: 3.5 W |
|------------------------|---|-------------------|----------------------|




Accuracy

kWh, accuracy (RDG) depending on the current

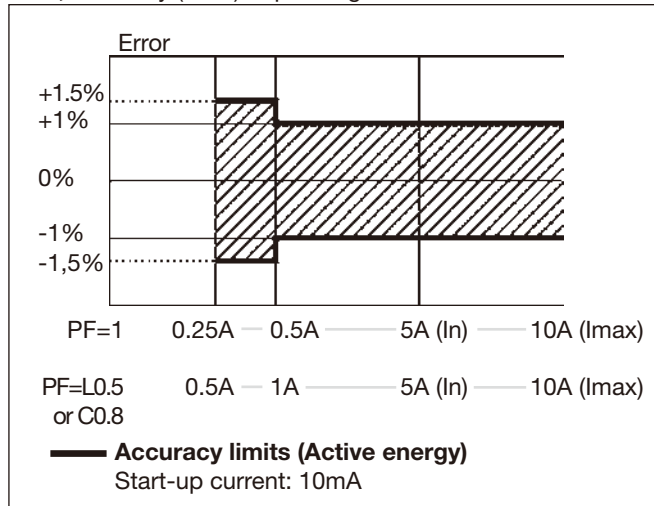

kvarh, accuracy (RDG) depending on the current

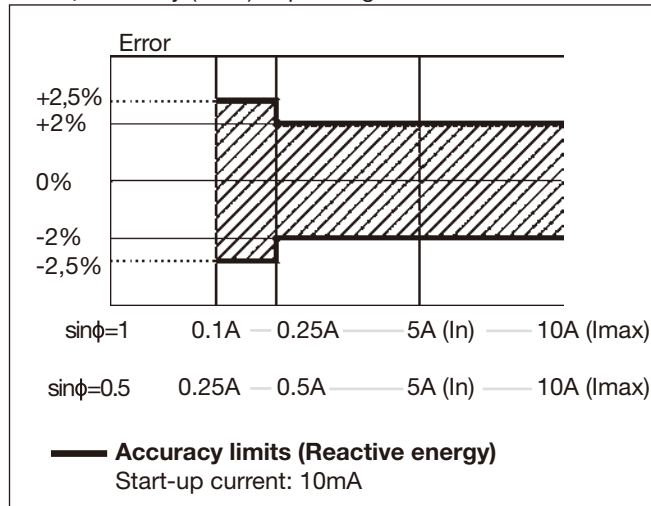

MID "Annex MI-003" compliance

Accuracy

AV5-AV6 models

0.9 Un ≤ U ≤ 1.1 Un;
0.98 fn ≤ f ≤ 1.02 fn;
fn: 50 or 60Hz;
cosφ: 0.5 inductive to 0.8
capacitive.
Class B
I st: 0.01A;
I min: 0.05A;

I tr: 0.25A;
I n: 5A;
I max: 10A

Operating temperature

-25°C to +55°C (-13°F to 131°F) (R.H. from 0 to 90% non-condensing @ 40°C)

EMC compliance

E2

Used calculation formulas

Phase variables

Instantaneous effective voltage

$$V_{1N} = \sqrt{\frac{1}{n} \cdot \sum_{i=1}^n (V_{1N})_i^2}$$

Instantaneous active power

$$W_1 = \frac{1}{n} \cdot \sum_{i=1}^n (V_{1N})_i \cdot (A_1)_i$$

Instantaneous power factor

$$PF = \frac{W_1}{VA_1}$$

Instantaneous effective current

$$A_1 = \sqrt{\frac{1}{n} \cdot \sum_{i=1}^n (A_1)_i^2}$$

Instantaneous apparent power

$$VA_1 = V_{1N} \cdot A_1$$

Instantaneous reactive power

$$var_1 = \sqrt{(VA_1)^2 - (W_1)^2}$$

Where: n= sample number

System variables

Equivalent three-phase voltage

$$V_{\Sigma} = \frac{V_1 + V_2 + V_3}{3}$$

Three-phase reactive power

$$var_{\Sigma} = (var_1 + var_2 + var_3)$$

Three-phase active power

$$W_{\Sigma} = W_1 + W_2 + W_3$$

Three-phase apparent power

$$VA_{\Sigma} = \sqrt{W_{\Sigma}^2 + var_{\Sigma}^2}$$

Three-phase power factor

$$\cos\phi_{\Sigma} = \frac{W_{\Sigma}}{VA_{\Sigma}} \quad (\text{TPF})$$

Energy metering

$$kWh_i = \int_{t_1}^{t_2} P_1(t) dt \cong \Delta t \sum_{j=n_1}^{n_2} P_1(j)$$

$$kvarh_i = \int_{t_1}^{t_2} Q_1(t) dt \cong \Delta t \sum_{j=n_1}^{n_2} Q_1(j)$$

Where:

P= active power;

Q= reactive power;

t₁, t₂ =starting and ending time points of consumption recording;

nj= time unit;

Δt= time interval between two successive power consumptions;

n₁, n₂ = starting and ending discrete time points of consumption recording



List of the variables that can be connected to:

- RS485 communication port
- Alarm outputs (“max” variable”, “energies” and “hour counter” excluded)
- Pulse outputs (only “energies”)

| No | Variable | 1-phase system | 2-phase system | 3-ph. 4-wire balanced sys. | 3-ph. 4-wire unbal. sys. | 3 ph. 3-wire bal. sys. | 3 ph. 3-wire unbal. sys. | Notes |
|----|--------------------------------------|----------------|----------------|----------------------------|--------------------------|------------------------|--------------------------|--|
| 1 | V L-N sys | o | x | x | x | x | x | sys=system |
| 2 | V L1 | x | x | x | x | x | x | |
| 3 | V L2 | o | x | x | x | x | x | |
| 4 | V L3 | o | o | x | x | x | x | |
| 5 | V L-L sys | o | x | x | x | x | x | sys=system |
| 6 | V L1-2 | o | x | x | x | x | x | |
| 7 | V L2-3 | o | o | x | x | x | x | |
| 8 | V L3-1 | o | o | x | x | x | x | |
| 9 | A dmd max | o | x | x | x | x | x | Highest “dmd” current among the phases (1) |
| 10 | A L1 | x | x | x | x | x | x | |
| 11 | A L2 | o | x | x | x | x | x | |
| 12 | A L3 | o | o | x | x | x | x | |
| 13 | VA sys | x | x | x | x | x | x | sys=system |
| 14 | VA sys dmd | x | x | x | x | x | x | sys=system (1) |
| 15 | VA L1 | x | x | x | x | x | x | |
| 16 | VA L2 | o | x | x | x | x | x | |
| 17 | VA L3 | o | o | x | x | x | x | |
| 18 | var sys | x | x | x | x | x | x | sys=system |
| 19 | var L1 | x | x | x | x | x | x | |
| 20 | var L2 | o | x | x | x | x | x | |
| 21 | var L3 | o | o | x | x | x | x | |
| 22 | W sys | x | x | x | x | x | x | sys=system |
| 23 | W sys dmd | x | x | x | x | x | x | sys=system (1) |
| 24 | W L1 | x | x | x | x | x | x | |
| 25 | W L2 | o | x | x | x | x | x | |
| 26 | W L3 | o | o | x | x | x | x | |
| 27 | PF sys | x | x | x | x | x | x | |
| 28 | PF L1 | x | x | x | x | x | x | |
| 29 | PF L2 | o | x | x | x | x | x | |
| 30 | PF L3 | o | o | x | x | x | x | |
| 31 | Hz | x | x | x | x | x | x | |
| 32 | Phase seq. | o | o | x | x | x | x | |
| 33 | Hours | x | x | x | x | x | x | |
| 34 | kWh (+) | x | x | x | x | x | x | Total or by user |
| 35 | kvarh (+) | x | x | x | x | x | x | Total or by user |
| 36 | kWh (+) | x | x | x | x | x | x | Partial or by tariff |
| 37 | kvarh (+) | x | x | x | x | x | x | Partial or by tariff |
| 38 | kWh (-) | x | x | x | x | x | x | Total |
| 39 | kvarh (-) | x | x | x | x | x | x | Total |
| 40 | m ³ Gas | x | x | x | x | x | x | Total |
| 41 | m ³ Cold H ₂ O | x | x | x | x | x | x | Total |
| 42 | m ³ Hot H ₂ O | x | x | x | x | x | x | Total |
| 43 | kWh H ₂ O | x | x | x | x | x | x | Total |
| 44 | A L1 THD | x | x | x | x | x | x | |
| 45 | A L2 THD | o | x | x | x | x | x | |
| 46 | A L3 THD | o | o | x | x | x | x | |
| 47 | V L1 THD | x | x | x | x | x | x | |
| 48 | V L2 THD | o | x | x | x | x | x | |
| 49 | V L3 THD | o | o | x | x | x | x | |
| 50 | V L1-2 THD | x | x | x | x | x | x | |
| 51 | V L2-3 THD | o | x | x | x | x | x | |
| 52 | V L3-1 THD | o | o | x | x | x | x | |

(x) = available

(o) = not available (zero indication on the display)

(1) Max. value with data storage



Display pages

| Sel. pos. | No | 1st variable (1st line) | 2nd variable (2nd line) | 3rd variable (3rd line) | Note | Applications | | | | | | | | |
|-----------|--|-------------------------|-------------------------|-------------------------|-------------------------------|--------------|---|---|---|---|---|---|---|--|
| | | | | | | A | B | C | D | E | F | G | H | |
| | 1 | Total kWh (+) | W sys dmd | W sys dmd max | | X | X | X | | X | X | X | X | |
| | 2 | kWh (+) | A dmd max | "PArT" | "PArT" = Partial kWh (+) | | | | | | X | X | X | |
| | 3 | Total kvarh (+) | VA sys dmd | VA sys dmd max | | | X | X | | | X | X | X | |
| | 4 | kvarh (+) | VA sys | "PArT" | "PArT" = Partial kvarh (+) | | | | | | X | X | X | |
| | 5 | Totalizer 1 (2) | W sys | (text) (3) | (1) | | | X | | | X | X | X | |
| | 6 | Totalizer 2 (2) | W sys | (text) (3) | (1) | | | X | | | X | X | X | |
| | 7 | Totalizer 3 (2) | W sys | (text) (3) | (1) | | | X | | | X | X | X | |
| | 8 | kWh (+) | t1 (text) (4) | W sys dmd | (1) digital input enabled | | | X | | | X | X | X | |
| | 9 | kWh (+) | t2 (text) (4) | W sys dmd | (1) digital input enabled | | | X | | | X | X | X | |
| | 10 | kWh (+) | t3 (text) (4) | W sys dmd | (1) digital input enabled | | | X | | | X | X | X | |
| | 11 | kWh (+) | t4 (text) (4) | W sys dmd | (1) digital input enabled | | | X | | | X | X | X | |
| | 12 | kvarh (+) | t1 (text) (4) | W sys dmd | (1) digital input enabled | | | X | | | X | X | X | |
| | 13 | kvarh (+) | t2 (text) (4) | W sys dmd | (1) digital input enabled | | | X | | | X | X | X | |
| | 14 | kvarh (+) | t3 (text) (4) | W sys dmd | (1) digital input enabled | | | X | | | X | X | X | |
| | 15 | kvarh (+) | t4 (text) (4) | W sys dmd | (1) digital input enabled | | | X | | | X | X | X | |
| | 16 | kWh (+) X | W X | User X | (1) specific function enabled | | | | X | | | | | |
| | 17 | kWh (+) Y | W Y | User Y | (1) specific function enabled | | | | X | | | | | |
| | 18 | kWh (+) Z | W Z | User Z | (1) specific function enabled | | | | X | | | | | |
| | 19 | Total kvarh (-) | VA sys dmd | VA sys dmd max | | | | | | | X | | X | |
| | 20 | Total kWh (-) | W sys dmd | W sys dmd max | | | | | | X | X | | X | |
| | 21 | Hours | W sys | PF sys | | | | | | X | X | X | X | |
| | 22 | Hours | var sys | PF sys | | | | | | X | X | X | X | |
| | 23 | W L1 | W L2 | W L3 | | | | | | X | | X | X | |
| | 24 | VA L1 | VA L2 | VA L3 | | | | | | | | X | X | |
| | 25 | var L1 | var L2 | var L3 | | | | | | | | X | X | |
| | 26 | PF L1 | PF L2 | PF L3 | | | | | | | | X | X | |
| | 27 | V L1 | V L2 | V L3 | | | X | | X | X | | X | X | |
| | 28 | V L1-2 | V L2-3 | V L3-1 | | | | | | | | X | X | |
| | 29 | A L1 | A L2 | A L3 | | | | | | X | | X | X | |
| | 30 | Phase seq. | V LN sys | Hz | | X | X | X | | X | X | X | X | |
| | 31 | Phase seq. | V LL sys | Hz | | | | | | | X | X | X | |
| | 32 | THD A1 | THD A2 | THD A3 | | | | | | | | X | X | |
| | 33 | THD V1 | THD V2 | THD V3 | | | | | | | | X | X | |
| | 34 | THD V12 | THD V23 | THD V 31 | | | | | | | | | | |
| | 35 | Lot number | Year | DMD time | | X | X | X | X | X | X | X | X | |
| | 36 | CT ratio | Value of CT | System | | X | X | X | X | X | X | X | X | |
| | 37 | VT/PT ratio | Value of VT | Connection | | | X | X | X | X | X | X | X | |
| | 38 a | Alarm 1 status | Set-point value | Variable type | | | X | X | X | X | X | X | X | |
| | 39 a | Alarm 2 status | Set-point value | Variable type | | | X | X | X | X | X | X | X | |
| | 40 a | Alarm 3 status | Set-point value | Variable type | | | X | X | X | X | X | X | X | |
| | 38 b | Pulse 1 status | Output pulse | | | X | X | X | X | X | X | X | X | |
| | 39 b | Pulse 2 status | Output pulse | | | X | X | X | X | X | X | X | X | |
| | 40 b | Pulse 3 status | Output pulse | | | X | X | X | X | X | X | X | X | |
| | 41 | Serial port | Address | RS485 status | | X | X | X | X | X | X | X | X | |
| 0 | Selector position which can be linked to any of the variable combinations listed above (No. from 1 to 46) | | | | | | | | | | | | | |
| 1 | Selector position which can be linked to any of the variable combinations listed above (No. from 1 to 46) | | | | | | | | | | | | | |
| 2 | Selector position which can be linked to any of the variable combinations listed above (No. from 1 to 46) | | | | | | | | | | | | | |
| 3 | Selector position which can be linked to any of the variable combinations listed above (No. from 1 to 46). In this position the front LED blinks proportionally to the reactive energy (kvarh) being measured | | | | | | | | | | | | | |

(1) The page is available according to the enabled measurement. (2) m³ Gas, m³ Water, kWh remote heating. (3) Hot or Cold (water). (4) The active tariff is displayed with an "A" before the "t1-t2-t3-t4" symbols.



Additional available information on the display

| Type | 1st line | 2nd line | 3rt line |
|-------------------------------------|---|---------------------------------------|-------------------------|
| Meter information pag.1 | Lot (production day) | Year of production | dmd time |
| Meter information pag. 2 | CT ratio | Value of CT ratio | System (1-2-3-phase) |
| Meter information pag. 3 | PT ratio | Value of PT ratio | Connection (2-3-4-wire) |
| In case of alarm output pag.4a | Alarm output 1, 2 or 3 status (ON/OFF) | Set-point value | Variable type |
| In case of pulse output pag. 4b | Pulse output 1,2 or 3 variable link (kWh/kvarh) | Output pulse weight (pulse/kWh/kvarh) | |
| In case of communication port pag.5 | Serial port | Address | RS485 status (RX-TX) |

List of selectable applications


| | Description | Notes |
|---|---|--|
| A | Basic domestic | Main energy metering |
| B | Shopping centres | Main energy metering |
| C | Advanced domestic | Main energy metering (total and based on tariff), gas and water metering |
| D | Multi domestic (also camping and marinas) | Main energy metering (3 by single phase) |
| E | Solar | Energy meter with some basic power analyzer functions |
| F | Industrial | Main energy metering |
| G | Advanced industrial | Energy metering and power analysis |
| H | Advanced industrial for power generation | Complete energy metering and power analysis |

Insulation between inputs and outputs

| | Measuring inputs | Relay | Open collector | Comm. port | Digital inputs | Auxiliary power supply |
|-------------------|------------------|-------|----------------|------------|----------------|------------------------|
| Measuring Inputs | - | 4kV | 4kV | 4kV | 4kV | 4kV |
| Relay output | 4kV | - | - | 4kV | - | 4kV |
| Open collector | 4kV | - | - | 4kV | - | 4kV |
| Comm. port | 4kV | 4kV | 4kV | - | 4kV | 4kV |
| Digital inputs | 4kV | - | - | 4kV | - | 4kV |
| Aux. power supply | 4kV | 4kV | 4kV | 4kV | 4kV | - |


NOTE: all the models with auxiliary power supply have, mandatory, to be connected to external current transformers because the insulation among the current inputs is just functional (100VAC).

Tamper proof and display page selection



Lock of programming with seal.
Selection of up to 4 main pages (programmable by the user).




Easy access to specific display pages.








Wiring diagrams




System type selection: 3P.n

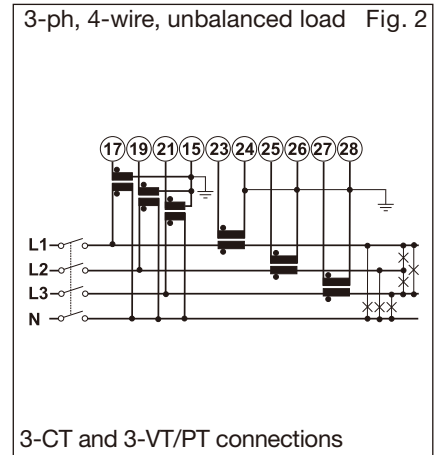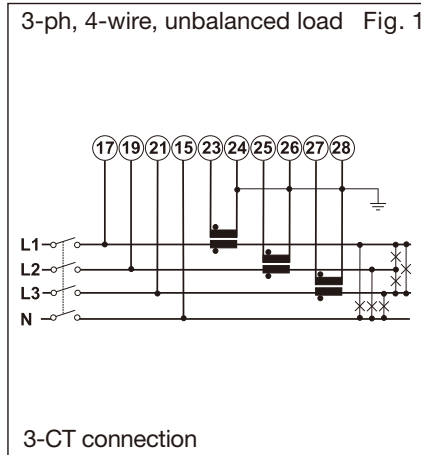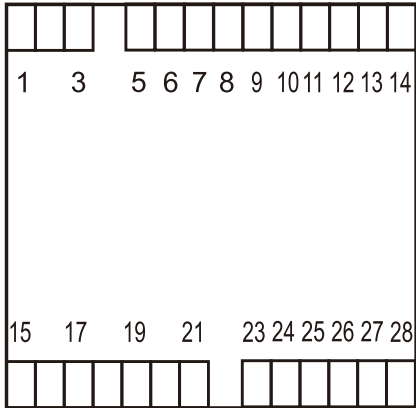

System type selection: 3P.n

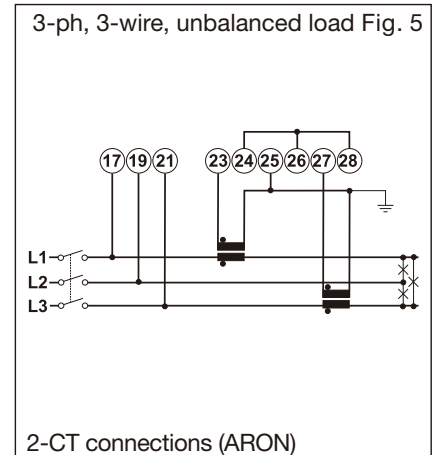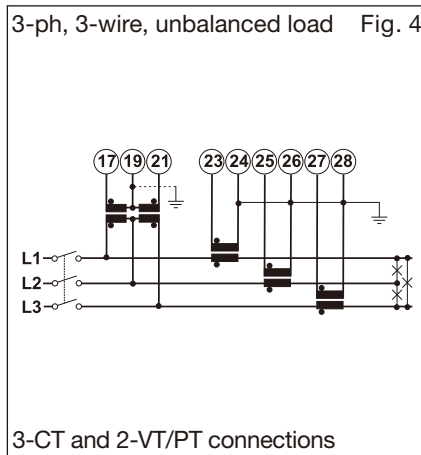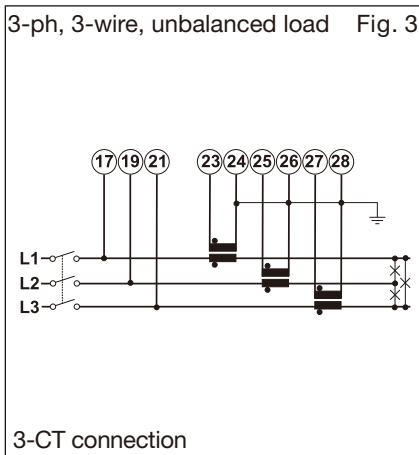



System type selection: 3P.1

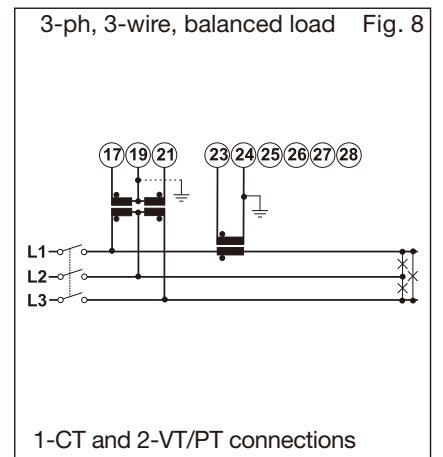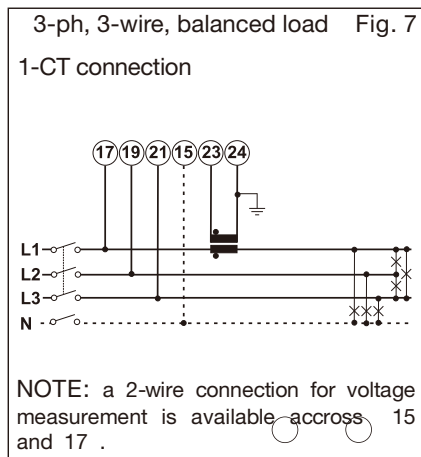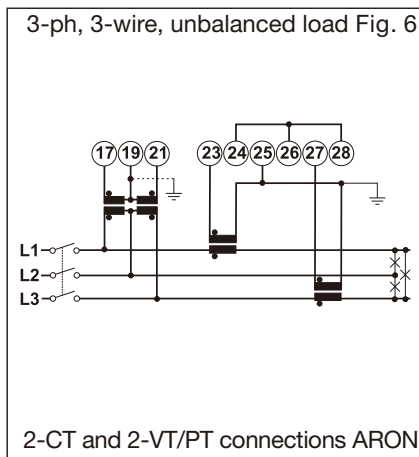




Wiring diagrams


System type selection: 2P

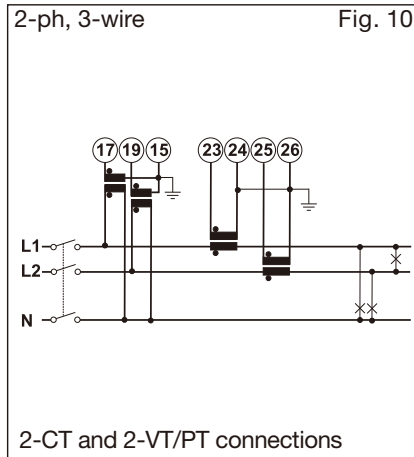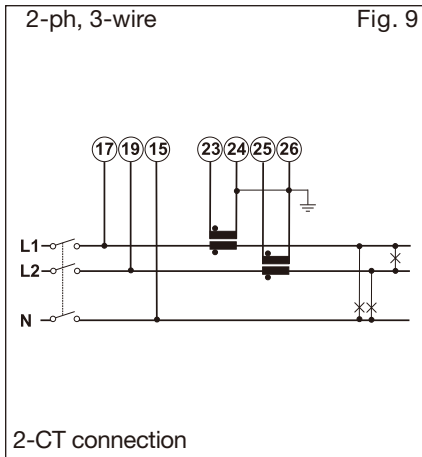



System type selection: 1P

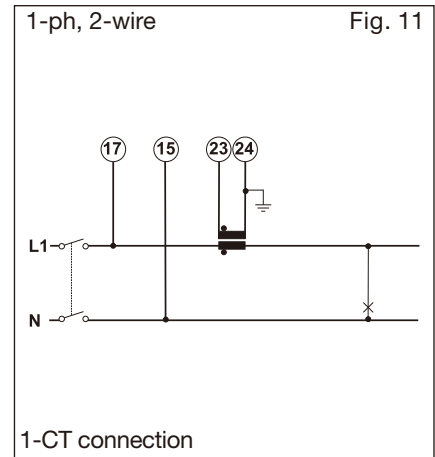



System type selection: 1P

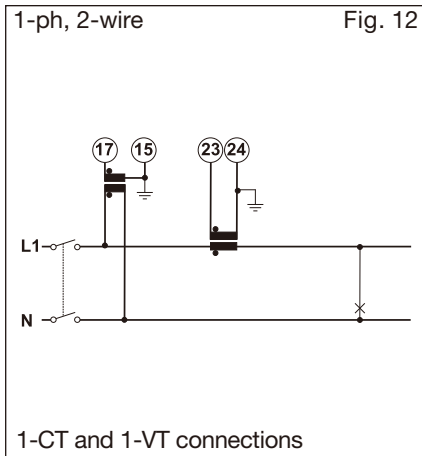

Auxiliary power supply wiring diagrams

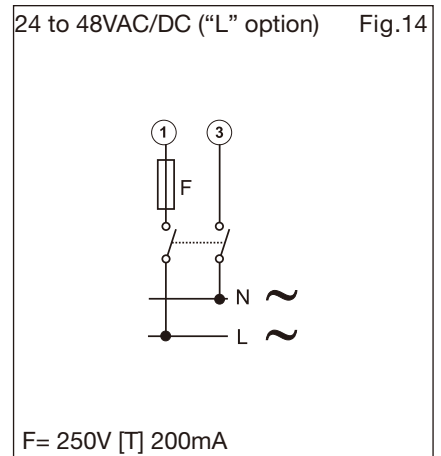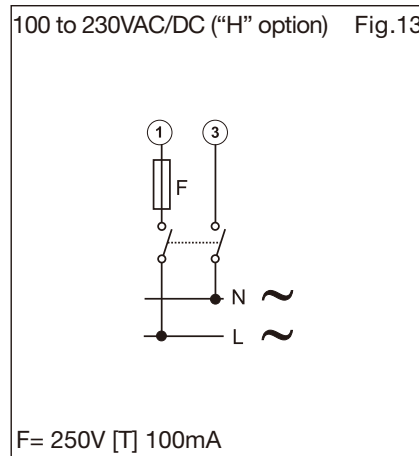




Digital inputs and RS485 port wiring diagrams

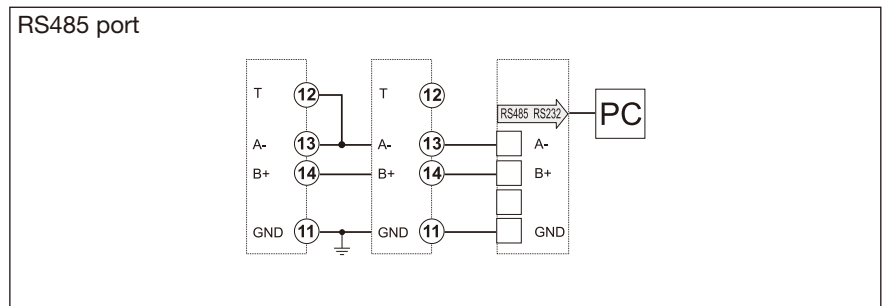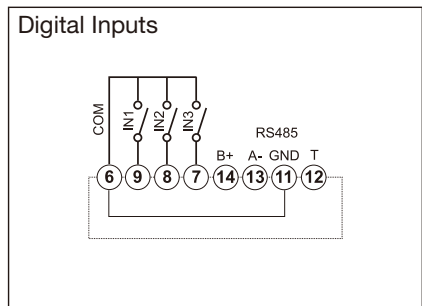

RS485 NOTE: additional devices provided with RS485 are connected in parallel. The termination of the serial output is carried out only on the last instrument of the network, by means of a jumper between (A-) and (T).




Open collector and relay outputs wiring diagrams

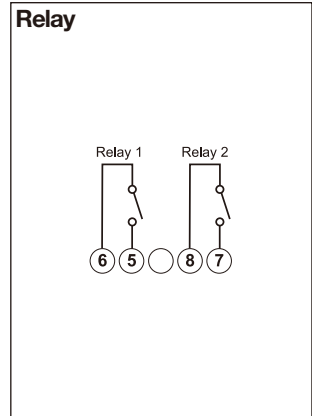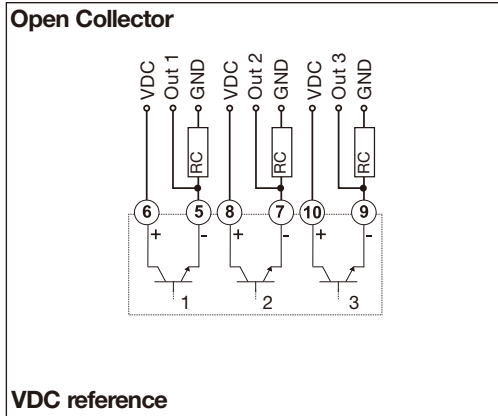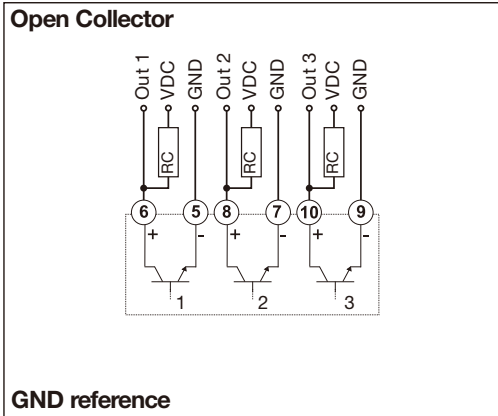

The load resistances (RC) must be designed so that the close contact current is lower than 100mA; the VDC voltage must be lower than or equal to 30VDC.

Front panel description

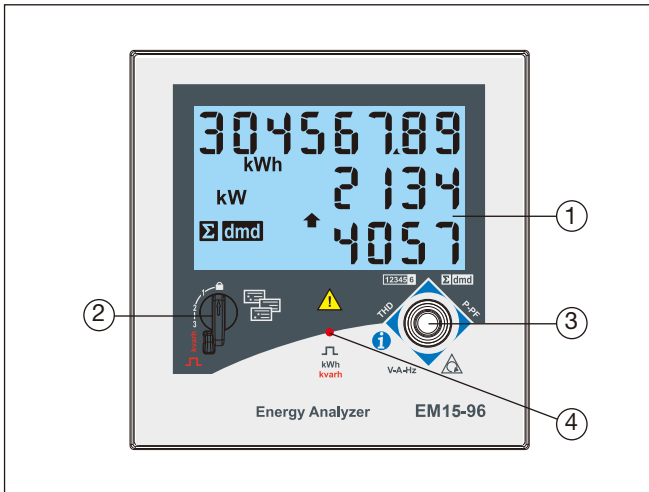

1. **Display**
LCD-type with alphanumeric indications to:
 - display configuration parameters;
 - display all the measured variables.
2. **Selector**
To select the desired display pages and to lock the programming.
3. **Joystick**
To program the configuration parameters and scroll the variables on the display.
4. **LED**
Red LED blinking proportional to the energy being measured.

Dimensions and Panel Cut-out

