




Data Sheet Santon X-Type switch XA60.25DU8-G-D




Suitable as photovoltaic disconnect switch in accordance with Article 690 of NFPA 70 (NEC)
UL 508i, (including the requirements for PV application)
UL 508i by UL



Terminals Scheme									
Layer No.	Front Side		Symbol	Rear Side		On Positions			
	Left	Right		Left	Right	1	2	3	4
3	-1			-1				X	X
2		+1			+1			X	X
1			empty						

Contacts are made in "X" marked position.
Symbols for interconnection: [

Technical data	Symbol	Merit	Unit
nominal voltage (DC poles)	U		600 V dc
nominal current (DC poles)	I		25 A dc
method of mounting	both bottom and single hole mounting [D]		
number of poles, dubble pole switching	2		
utilization category DC	Photovoltaic disconnect switch		
actuator	knob with padlock and top screw, black/grey [G]		
method of operation	independent manual operation		
positions	OFF at 3 hr, ON at 6 hr, OFF at 9 hr, ON at 12 hr		
rated impulse withstand voltage	Uimp		8 kV
insulation voltage	Ui		600 V
rated thermal current uninterrupted duty	Iu		25 A
rated short-time withstand current (1s)	Icw		750 A
suitable for use on a circuit capable of delivery not more than 5.000 rms symmetrical Amperes, 600 Vdc max, when protected by fuses			
rated conditional short-circuit current			5 kA
max power dissipation			2 W
minimum required dimensions of enclosures L x W x H*			124 x 47 x 63,5 mm
Shaft length			mm
Enclosure depth from inside bottom to outside top, required for the switch and knob			96,5 mm
* see the drawing for the height of the switch. The number of layers N is:			
tightening torque terminal screws M4 , min. - max.		1,5	1,7 Nm
		13	15 Lb.In
tightening torque M3 screw in the standard black knob, min. - max.		0,5	0,7 Nm
		5	6 Lb.In
tightening torque for the nut on the single hole mounting knob, min. - max.		1,8	2,0 Nm
		16	18 Lb.In
wire size, "Use 75°C Copper Wire Only", minimum required fine wire cross-section:			
			4 mm²
			10 AWG
ambient temperature allowed between			- 20 to + 70 °C
storage temperature allowed between			- 40 to + 80 °C
maximum relative humidity, without condensation at 20°C			90 %
rated operational voltage (AC poles)	U		V ac
rated operational current (AC poles)	I		A ac
number of AC poles			
auxiliary contact ratings			No auxiliary contact
weight			194 g
accessories:	-		
	-		

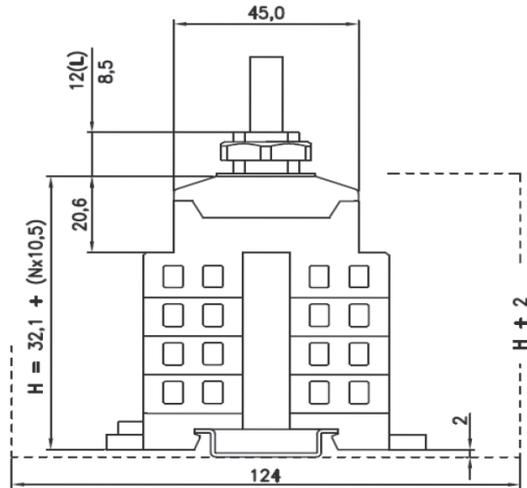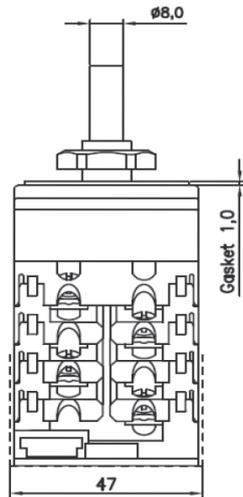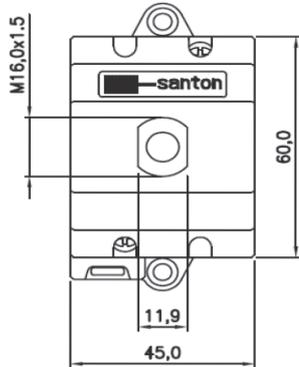

Mounting instructions


In the application all ratings have to be respected. When building the switch in an enclosure, the space envelope must be respected according to the applicable standards. The terminals, without interconnection can take copper wires up to 6 mm². The recommended Spade Tongue Terminals may have a maximum width of 9 mm. For CSA and UL applications, registered Spade Tongue Terminals must be used. The registration numbers are UL: E13288 and CSA: LR7189 (for instance type 165015 from Tyco). After mounting, the wiring must be checked and the switch must operate smoothly.

Maintenance


The X type switches are designed for a very long life but it is advised to do some simple yearly maintenance.

- Check the installation for signs of overload or overheating. The terminals may not exceed the limit of 85°C under full load.
- By operating the switch a few times (5x) the contacts will clean themselves and the switch will have a longer life.


A type knob




D type knob



B type knob



O type knob



Dimensions, specifications and data shown are be subject to change without notice.