




# PV Connector

## 太陽能快速接頭

### Brochure

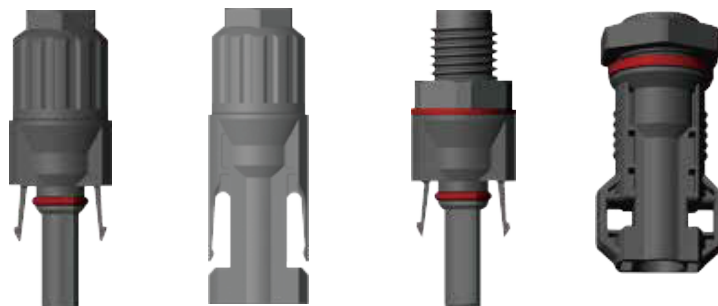







note: subject to change without any notice, JDA pay no responsibility



Electrical data & Safety 安全規格	
Rated current & voltage 額定電流&電壓	25A,1000(TUV), 600V(UL)
Contact resistance 阻抗	<5mΩ
flame proof 防火等級	UL-94-V0
Water proof 防水等級	IP-67
operation temp. 操作溫度	-40°C ~ +85°C

Mechanical Data 機械規格	
Plastic housing 塑膠外殼材質	PPO +PA
Metal pin 金屬端子	Tin plated copper 銅端子·鍍錫
Insertion force 插入力	< /=50N
Withdraw force 拉拔力	> /=50N

Photo 圖片	Item no. 料號	Specification 規格	Wire size 線徑
	JDA-M24AT-02	Cable end, male, Neutral, w/Φ2.4 lathing pin, compatible with Tyco	2.5 mm <sup>2</sup>
	JDA-M24AT-06	線端連接器·公接頭·中性·附直徑 2.4 之車 pin 端子·與 Tyco 相容	4.0 or 6.0 mm <sup>2</sup>
	JDA-M24AT-02	Cable end, male, plus key, w/Φ2.4 lathing pin, compatible with Tyco	2.5 mm <sup>2</sup>
	JDA-M24AT-06	線端連接器·公接頭·正極·附直徑 2.4 之車 pin 端子·與 Tyco 相容	4.0 or 6.0 mm <sup>2</sup>
	JDA-M24AT-02	Cable end, male, minus key, w/Φ2.4 lathing pin, compatible with Tyco	2.5 mm <sup>2</sup>
	JDA-M24AT-06	線端連接器·公接頭·負極·附直徑 2.4 之車 pin 端子·與 Tyco 相容	4.0 or 6.0 mm <sup>2</sup>
	JDA-F24AT-02	Cable end, female, plus key, w/Φ2.4 lathing pin, compatible with Tyco	2.5 mm <sup>2</sup>
	JDA-F24AT-06	線端連接器·母接頭·正極·附直徑 2.4 之車 pin 端子·與 Tyco 相容	4.0 or 6.0 mm <sup>2</sup>
	JDA-F24AT-02	Cable end, female, minus key, w/Φ2.4 lathing pin, compatible with Tyco	2.5 mm <sup>2</sup>
	JDA-F24AT-06	線端連接器·母接頭·負極·附直徑 2.4 之車 pin 端子·與 Tyco 相容	4.0 or 6.0 mm <sup>2</sup>
	JDA-M24CT-02	Panel end, plus key, w/Φ2.4 lathing pin, compatible with Tyco	2.5 mm <sup>2</sup>
	JDA-M24CT-06	板端連接器·正極·附直徑 2.4 之端子·與 Tyco 相容	4.0 or 6.0 mm <sup>2</sup>

note: subject to change without any notice, JDA pay no responsibility



Photo 圖片	Item no. 料號	Specification 規格	Wire size 線徑
	JDA-M24CT-02	Panel end, minus key, w/φ2.4 lathing pin, compatible with Tyco	2.5 mm <sup>2</sup>
	JDA-M24CT-06	板端連接器·負極·附直徑 2.4 之車 pin 端子·與 Tyco 相容	4.0 or 6.0 mm <sup>2</sup>
	JDA-M40AC-02	Cable end, male, w/φ4.0 stamping pin, compatible with MC	2.5mm <sup>2</sup>
	JDA-M40AC-06	線端連接器·公接頭·附直徑 4.0 之沖 pin 端子·與 MC 相容	4.0 or 6.0 mm <sup>2</sup>
	JDA-F40AC-02	Cable end, female, w/φ4.0 stamping pin, compatible with MC	2.5mm <sup>2</sup>
	JDA-F40AC-06	線端連接器·母接頭·附直徑 4.0 之沖 pin 端子·與 MC 相容	4.0 or 6.0 mm <sup>2</sup>
	JDA-M40CC-02	Panel end, male, w/φ4.0 stamping pin, compatible with MC	2.5mm <sup>2</sup>
	JDA-M40CC-06	板端連接器·公接頭·附直徑 4.0 之沖 pin 端子·與 MC 相容	4.0 or 6.0 mm <sup>2</sup>
	JDA-F40CC-02	Panel end, female, w/φ4.0 stamping pin, compatible with MC	2.5mm <sup>2</sup>
	JDA-F40CC-06	板端連接器·母接頭·附直徑 4.0 之沖 pin 端子·與 MC 相容	4.0 or 6.0 mm <sup>2</sup>
	JDA-MHA60-010	Cable end, male, for 60A high current, w/φ4.0 lathing pin 線端連接器·公接頭·大功率 60A·附直徑 4.0 之車 pin 端子	10mm <sup>2</sup>
	JDA-FHA60-010	Cable end, female, for 60A high current, w/φ4.0 lathing pin 線端連接器·母接頭·大功率 60A·附直徑 4.0 之車 pin 端子	10mm <sup>2</sup>
	JDA-FHC90-010	Panel end, male, for 60A or 90A high current, w/φ4.0 lathing pin	10 mm <sup>2</sup>
	JDA-MHC90-016	板端連接器·公接頭·大功率 60A 或 90A·附直徑 4.0 之車 pin 端子	16 mm <sup>2</sup>
	JDA-FHC90-010	Panel end, female, for 60A or 90A high current, w/φ4.0 lathing pin	10 mm <sup>2</sup>
	JDA-FHC90-016	板端連接器·母接頭·大功率 60A 或 90A·附直徑 4.0 之車 pin 端子	16 mm <sup>2</sup>

note: subject to change without any notice, JDA pay no responsibility