



## SANTERNO TG 760 1000V TL-NA

Central Inverter for Large-Scale Solar Farms



### Features

- Rated output power: 760 kW
- Power factor: +1-0.9 @ rated power
- Max operating temperature: 50 °C w/o active power limitation
- Industry leading 98 % CEC weighted efficiency
- 1000 V DC maximum open circuit voltage
- Outdoor installation (Nema 3R)
- UL/CSA compliant
- Up to 10 integrated DC input fuses
- Best in class for reliability and uptime
- Built-in data logger for remote monitoring and diagnostic
- Easily accessible components for better maintenance and service
- Compliant with different grid features (LVRT, frequency transients, active and reactive power)
- CAISO and FERC 661-A compliant
- Available on a 1.5 MW skid or cubicle station

note: subject to change without any notice, JDA pay no responsibility



The inverters of the SUNWAY TG series are full-digital photovoltaic inverters optimized for utility scale applications.

Designed and manufactured in Italy by the technicians of Elettronica Santerno S.p.A., they feature the most advanced electronics technology. The Sunway TG range ensures maximum flexibility with top in class performance.

## **BENEFITS**

- Very high conversion efficiency with a single power conversion stage, optimized for minimum losses
- Modular construction and cabinet industrialization for maximum reliability and easy access to all components for maintainability and ease of service on site
- Grid Code integrated features (LVRT, Reactive Power Control, Frequency and Voltage control) in compliance with the most advanced European and WW standards
- Remote monitoring possibility with SunwayPortal and REMOTE SUNWAY™ software both for a single device and a multi-inverter installation
- Integrated DC-side protection with on load breaker with automatic disconnection
- Integrated miswiring protection on DC side
- Up to 10 fuse-protected integrated DC inputs, up to 20 with external DC parallel (option)
- Integrated AC-side protection with on load breaker with automatic disconnection
- Integrated active monitoring of DC isolation
- Integrated Modbus on RS485 and TCP-IP on Ethernet data connection
- Integrated inputs for environmental sensors
- Diagnostic messages on alphanumeric display that allow quick setting of parameters during start up and realtime monitoring during operation
- Possible use of photovoltaic modules that require an earthed pole, both positive and negative pole
- Thorough manufacturing with first class materials, all Made in Italy



Caratteristiche generali / Main features	
Model	SUNWAY TG 760 1000V TE
PV field voltage range	550-820 V(dc)
Open-circuit voltage	1000 V(dc)
Output voltage	360 V(ac) +10%
Output frequency	50 Hz /60 Hz (up to -3 Hz/ +2 Hz)
Default Cos $\phi$ - Min Cos $\phi$	1 - 0.9 lead/lag
Operating temperature range	-20°C + 50 °C ( -4 °F to 122 °F ) without derating
Degree of protection	IP20/NEMA 1 (indoor version) IP54/NEMA 3R (outdoor version)

Valori di ingresso /Input Ratings	
Suggested Peak Power <sup>(1)</sup>	879 kWp <sup>(1)</sup>
Rated DC input power	783 kW
Rated input current	1338 A (dc)
Maximum short circuit PV input current	1650 A (dc)
PV voltage ripple	<1%

Valori di uscita BT /LV Output Ratings	
Max AC output power <sup>(2)</sup>	836 kW
Max AC output power <sup>(3)</sup>	844 kW
Rated AC total power	790 kVA
Rated AC output power	760 kW
Rated output current	1290 A
Power Threshold	1% of Rated AC output power
Total AC current distortion	≤3%

Rendimento Inverters / Inverter efficiency	
Maximum Efficiency	98.5%
European Efficiency	98.1%

Dimensioni / Dimensions	
Inverter dimensions (WxHxD)	2606x2100x806 mm (indoor version) 2766x2303x1006 mm (outdoor version)
Inverter Weight (kg) Indoor / Outdoor	2100 kg (indoor version) 2200 kg (outdoor version)

Assorbimenti ausiliari / Auxiliary Consumption	
Fan Losses	2165 W
Losses when stopped/Night losses	45 W / 45 W
Max auxiliary power consumption	2210 W
Anticondensation heater power consumption <sup>(4)</sup>	1kW

Elettronica Santerno reserves the right to make any technical changes to this document without prior notice.

NOTE

(1) Suggested Peak Power is a reference value and is not to be used as a final power dimensioning criterion.

(2) Vac +10% Vac rated

(3) Vac rated, Tamb<35°C (95°F)

(4) Option recommended for Outdoor configuration in medium/cold climate environment



Informazioni aggiuntive/ Additional information	
Protection against overvoltage (SPD)	DC: yes - AC: optional
Relative humidity	95% non condensing
Cooling system	Forced air
Airflow	12000 m3/h
Thermal protection	Integrated, 5 sensors, both on cabinet and power stack
Environmental Sensors	6 embedded inputs
Digital Communication Channels	2xRS485 with Modbus + Ethernet with TCP/IP

## Operating description

Daily operation is completely automated and the inverter working point is continuously adapted to the PV generator characteristic in order to extract and convert the maximum available power. A digital DSP control ensures perfect synchronization with the grid voltage and phase, with the best power quality and a factory calibrated  $\cos\phi = 1$ .

Utility Interactive Features are embedded, software controlled, completely configurable based on the applicable grid code.

Best reliability is ensured by design. All electronics PCBs are coated for best protection against harsh environment. Moreover, redundant protection systems and auto-diagnostic functions are implemented.

Auxiliary power and LVRT are self-supplied, neither external power nor UPS is needed, but it is possible to connect an external source, if desired.

## Optional accessories

**Integrated DC Fuse Bar** : optionally SUNWAY TG TE inverters can be provided with an integrated input DC Parallel bar, that extends the number of connectable DC inputs and ensure additional protection of each DC Input by means of fuses installed in series on both poles of PV Field (each fuse state is monitored by a fuse blown signalling contact). Fuse number and size must be chosen depending on the number of DC cables and current ratings. Santerno catalogue offers a wide set of fuses.

Max Number of Inputs: 10

**External DC Fuse Bar (Sunway DC Parallel)** : having the same function as the integrated DC Fuse Bar, the Sunway DC Parallel external cabinet enables wiring and parallel-connecting up to 20 inputs with fuse protection on both poles.

Number of Inputs: up to 20

**Earth connection** : optionally, the SUNWAY TG TE inverters can be provided with positive- or negative- ground connection of the PV field. That option must be defined while ordering the equipment and it is made internally, with a monitored fuse connected to ground.



When using modules sensitive to the PID (potentially induced degradation) it is suggested to properly configure the PV field with ground connection.





## Included accessories

All inverters are supplied with user manuals, technical documentation complying with the regulations in force, keys and lifting hooks, dedicated pallets for easy and safe transport.

## Indoor Layout

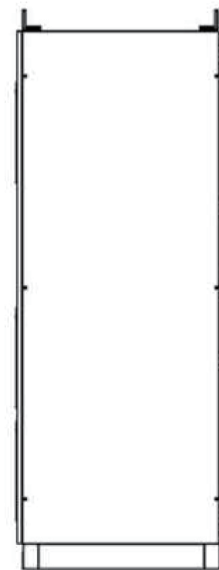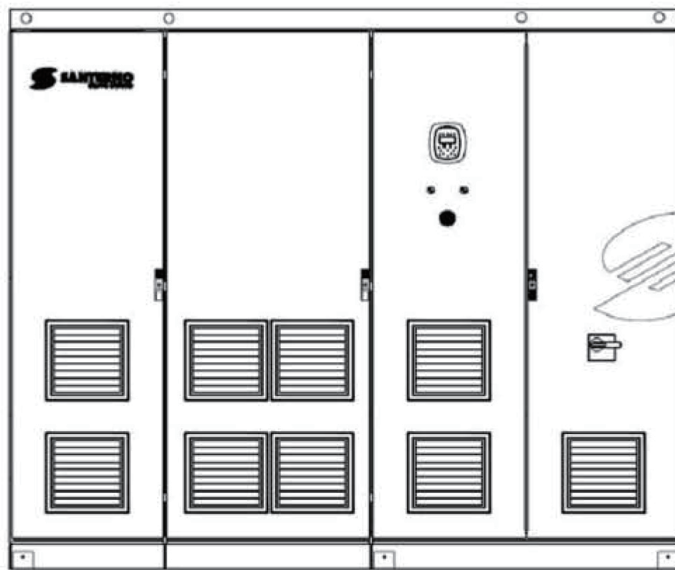

## Outdoor Layout

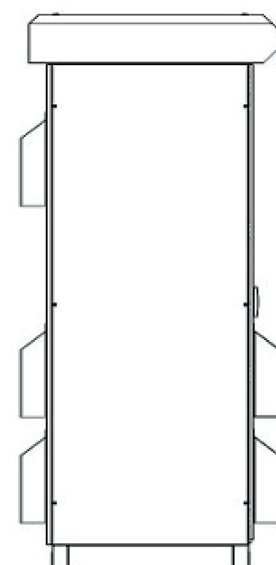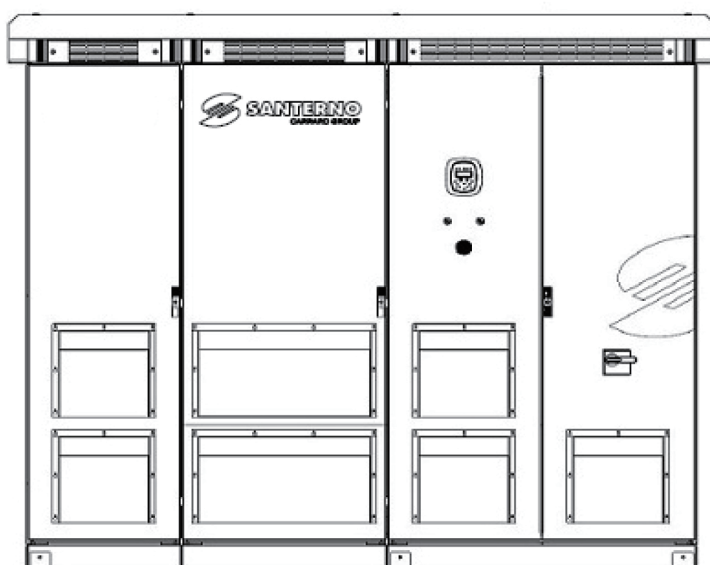



## Main Normative References


The SUNWAY TG inverters have been developed, designed and manufactured in accordance with the up-to-date requirements of the Low Voltage directives, Electromagnetic Compatibility directives and Grid Connection standards.

Standards	
EMC/Model	61000-6-2
Safety	IEC 62109-1, IEC 62109-2
Harmonics	61000-3-4, 61000-3-12
Immunity	EN61000-4-2, EN61000-4-4, EN61000-4-5 EN55011 group 1 class B
Insulation voltage to ground and between input and output	2.5 kV to 50Hz for 60 sec.
Grid connection	CEI 0-21, CEI 0-16 (Italy) BDEW (Germany) CQC (China) UL 1741 and IEEE 1547 (USA)



日煬國際事業股份有限公司  
JD Auspice Co., Ltd.



 [www.jdauspice.com](http://www.jdauspice.com)



 [@jdauspice](https://www.facebook.com/jdauspice)



 ID : @jdapv

