


Growatt Solar Inverter 8000-11000 TL-US



Leading - edge Technology

- High efficiency of 97.8% delivery more energy
- Integrated DC disconnect switch
- Consistent and stable performance across entire input voltage and output power range
- Intelligent temperature management
- Power balancer for three-phase grid connection
- Ethernet / RF technology / WiFi
- Sound control, easy installation maintenance procedure
- Newest generation IGBTs and advanced MPPT algorithms

Growatt 11000tl-us efficiency

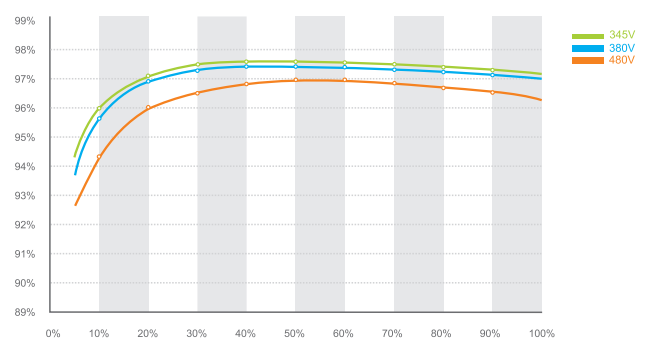



Datasheet **Growatt 8000TL-US** **Growatt 9000TL-US** **Growatt 10000TL-US** **Growatt 11000TL-US**

Input Data

Max. DC power	8300W	9300W	10350W	11400W
Max. DC voltage	600V	600V	600V	600V
Start voltage	360V	360V	360V	360V
DC nominal voltage	345V@208VAC 379V@240VAC	345V@208VAC 379V@240VAC	345V@208VAC 379V@240VAC	379V
PV voltage range	300-600V@208VAC 345-600V@240VAC	300-600V@208VAC 345-600V@240VAC	300-600V@208VAC 345-600V@240VAC	345-600V
MPP voltage range	300-480V@208VAC 345-480V@240VAC	300-480V@208VAC 345-480V@240VAC	300-480V@208VAC 345-480V@240VAC	345-480V
Number of independent MPP trackers/strings per MPP tracker	1 / 4	1 / 4	1 / 4	1 / 4
Max. input current / per string	30A / 16A	33A / 16A	36A / 16A	35A / 16A

Output (AC)

Rated AC output power	8000W	9000W	10000W	11000W
AC nominal voltage; range	208V/240V; 183~229V@208V, 211~264V@240V			240V; 211~264V
AC grid frequency; range	60Hz;59.3-60.5Hz	60Hz;59.3-60.5Hz	60Hz;59.3-60.5Hz	60Hz;59.3-60.5Hz
Max. output current	44A@208VAC 38A@240VAC	48A@208VAC 43A@240VAC	49A@208VAC 48A@240VAC	48A
Power factor	1	1	1	1
THDI	<3%	<3%	<3%	<3%
AC connection	Two phase	Two phase	Two phase	Two phase

Efficiency

Max. efficiency	97.8%	97.8%	97.8%	97.8%
CEC. efficiency	97%	97%	97%	97%
MPPT efficiency	99.5%	99.5%	99.5%	99.5%

Protection Devices

DC reverse-polarity protection	yes	yes	yes	yes
Input over voltage protection -Varistor	opt	opt	opt	opt
DC insulation measure	yes	yes	yes	yes
AC short circuit protection	yes	yes	yes	yes
Output over voltage protection -Varistor	yes	yes	yes	yes
AFCI compliant to UL 1699B	yes	yes	yes	yes

General Data

Dimensions (W / H / D)	400/743/222 mm	400/743/222 mm	400/743/222 mm	400/743/222 mm
Weight	40kg	40kg	40kg	40kg
Operating temperature range	-25 °C ... +60 °C	-25 °C ... +60 °C	-25 °C ... +60 °C	-25 °C ... +60 °C
Noise emission	< 46 dB	< 46 dB	< 46 dB	< 46 dB
Self-Consumption (night)	< 0.5 W	< 0.5 W	< 0.5 W	< 0.5 W
Topology	Transformerless	Transformerless	Transformerless	Transformerless
Cooling concept	Fan cooling	Fan cooling	Fan cooling	Fan cooling
Electronics protection rating /connection area	NEMA 3R	NEMA 3R	NEMA 3R	NEMA 3R
Altitude	2000m without derating	2000m without derating	2000m without derating	2000m without derating
Relative Humidity	100%	100%	100%	100%

Features

Display	LCD	LCD	LCD	LCD
Interfaces: RS232/RS485/Ethernet/RF/WiFi	yes / yes / opt / opt / opt	yes / yes / opt / opt / opt	yes / yes / opt / opt / opt	yes / yes / opt / opt / opt
Warranty: 10 years / 15 years	yes / opt	yes / opt	yes / opt	yes / opt

Certificates and Approvals

UL1741, UL1998, IEEE1547, FCC Part 15(class B), CSA C22.2 No.107.1