



日煬國際事業股份有限公司  
JD Auspice Co., Ltd.

# PRY-CAM

BREAKTHROUGH TECHNOLOGY FOR  
CONDITION ASSESSMENT AND  
ASSET MANAGEMENT



PRY-CAM

Prysmian  
Group

note: subject to change without any notice, JDA pay no responsibility



# WELCOME TO PRY-CAM

## A REVOLUTION IN PARTIAL DISCHARGE MANAGEMENT

The worlds of partial discharge (PD) measurement, asset management and condition assessment of electrical assets are undergoing a revolution.

It's a revolution that can help us prevent failures and service interruptions.

A revolution that harnesses the extraordinary possibilities of the Internet of Things. Where PD measurement and condition assessment data can be collected and stored via the Cloud, to be accessed and shared remotely – across sites, cities, countries and continents.

Allowing effective maintenance strategies for electrical assets and learning for continuous improvement.

It's a revolution that puts cutting-edge technology into the hands of the right people, where it's most effective, in a way that's easier than ever before.




The logo for JDA, consisting of the letters 'JDA' in white inside a red circle.

日揚國際事業股份有限公司  
JD Auspice Co., Ltd.


## LEADING THIS REVOLUTION IS PRY-CAM FROM PRYSMIAN ELECTRONICS

A fast, flexible, reliable game-changer.  
A portable instrument that performs  
online PD measurement without service  
interruption. All born of 140 years'  
expertise in designing and delivering  
world-leading cable technology.

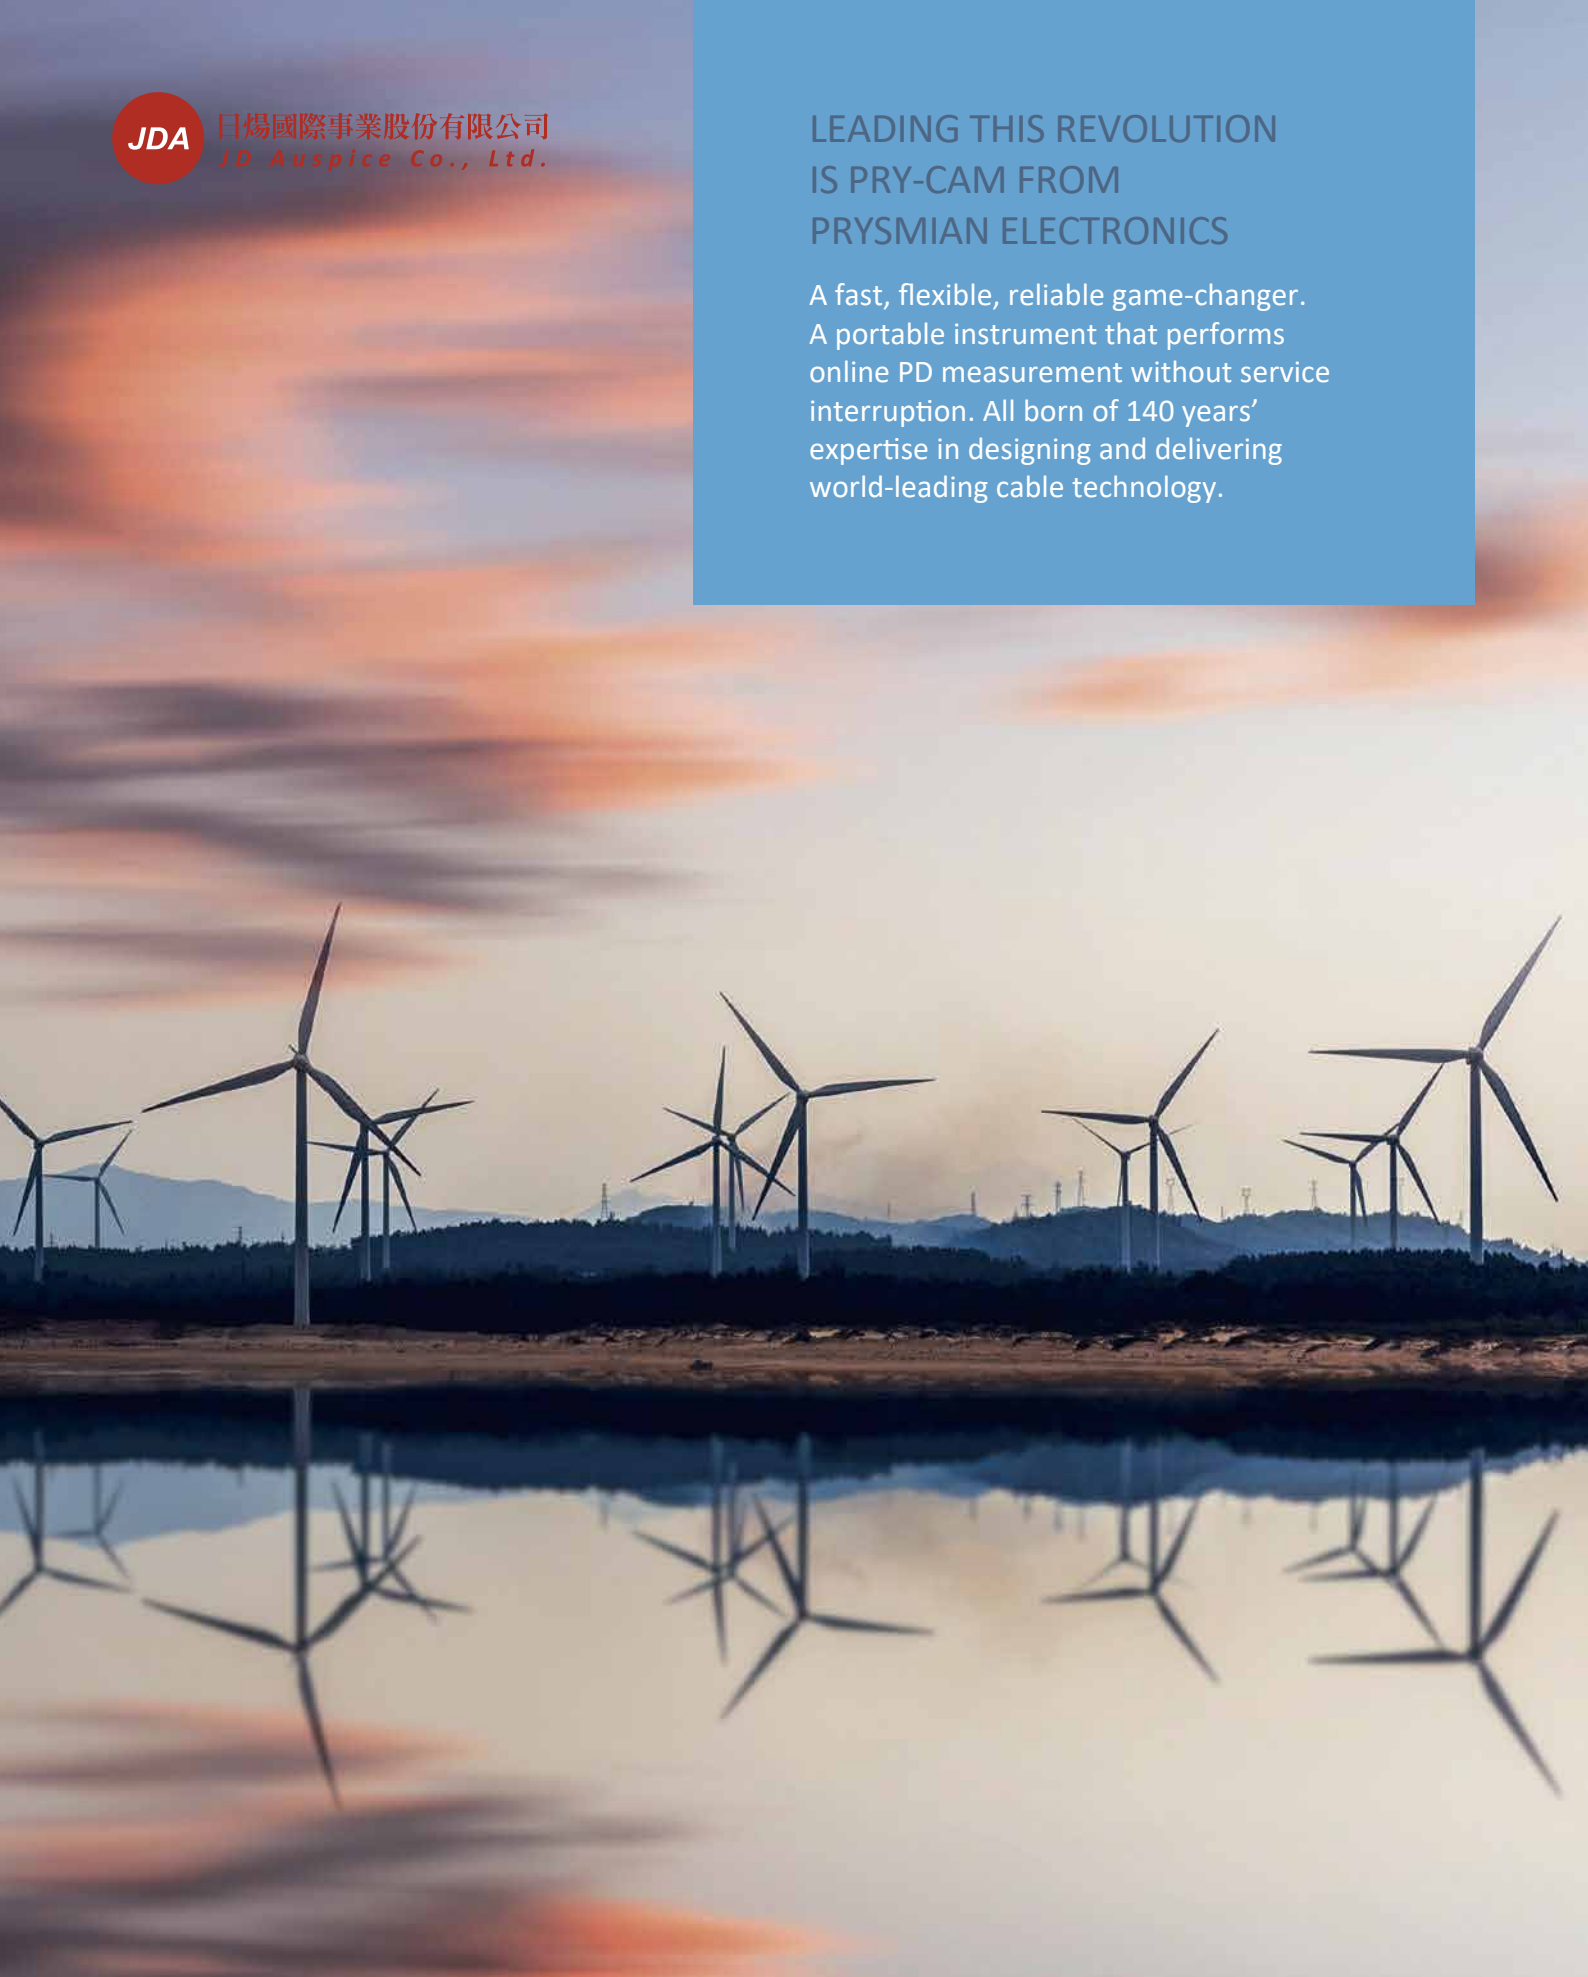

# INTRODUCING PRYSMIAN ELECTRONICS

A CUTTING-EDGE COMPANY WITH  
PRYSMIAN GROUP'S DNA

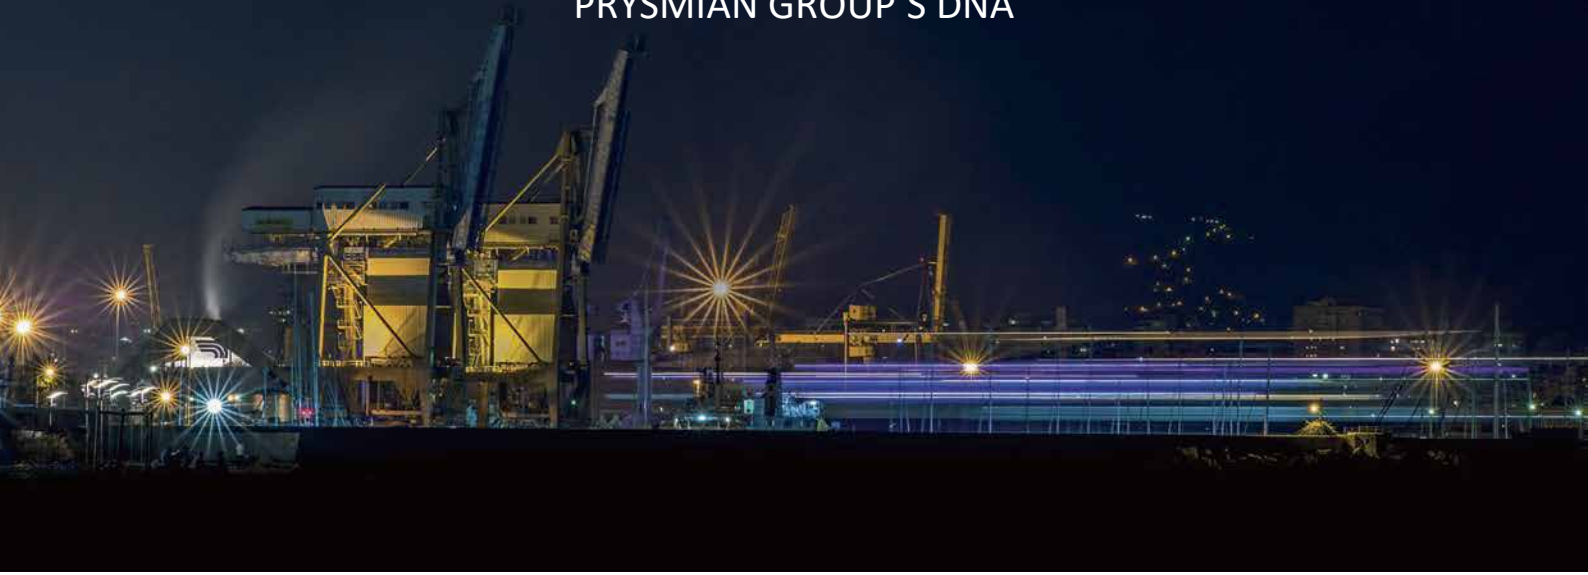

Every day, our technologies help customers by increasing uptime and safety, enhancing asset longevity and significantly reducing maintenance costs and risks.

## OUR CORE VALUES:



Bring innovation to the  
Energy and Oil & Gas markets



Create simple products  
for complex problems



Revolutionise technologies  
for asset management

We're always developing new products and solutions for asset condition assessment and monitoring, driving widespread and lasting improvement in asset management strategy. And thanks to our cable systems DNA – based on long-standing experience in insulation materials – we're developing the most powerful diagnostics tools. It's why we're a world leader.

We're solving problems  
today, and delivering  
learning for tomorrow.



## AN INNOVATIVE SOLUTION TO A REAL-WORLD CHALLENGE

Partial Discharge (PD) measurement is a crucial procedure for assessing the condition of electrical systems. In fact, it's one of the critical parameters evaluated during product manufacture, installation and normal operation. However PD testing was never widely used as a powerful online diagnostic tool due to several limitations of traditional PD technologies. In fact, these technologies for online condition assessment of MV and HV assets used to be complex, expensive, unscalable to the whole asset, and nearly impossible to integrate with all key asset parameters. In particular:

- ◆ traditional field-based technology for PD testing requires the electrical system *to be switched off and connected to test equipment* while diagnostics are conducted. This procedure leaves the system idle for several hours during each test. In addition, they are often too expensive and complex to be operated by a non-PD expert, and defect detection and localisation can't always be performed online.
- ◆ traditional handheld ultrasound or acoustical instruments aren't sensitive enough to detect and localise small but critical defects.

### THE PRY-CAM ANSWER

PRY-CAM wireless technology allows PD testing to be performed at a distance, without the need for a direct connection to what is being tested. This means that measurements can be taken without having to switch the system off. And with a greater degree of safety for operators too.

Now, PRY-CAM's revolutionary technology allows online, accurate and reliable PD measurements, diagnosis and defect localisation.

**It's faster, more accurate and more effective than ever before.**

### THE PRY-CAM FAMILY

The PRY-CAM family features not only PRY-CAM Portable but a range of cutting-edge products covering every aspect of condition assessment and asset monitoring.

Suitable for any electrical equipment from 3 kV to 600 kV.

#### USE ON HV AND MV EQUIPMENT



CABLES



SWITCHGEAR



JOINTS



TRANSFORMERS



TERMINATIONS



ELECTRICAL MACHINES



TO DETECT



TO PREVENT



TO MONITOR



TO LOCALISE



# PRY-CAM CLOUD

YOUR ASSETS UNDER CONTROL


## HOW IT WORKS

PRY-CAM CLOUD is the ideal way to empower your business by effectively managing your data. Your measurements, collected by PRY-CAM devices, can be safely stored and protected on the PRY-CAM CLOUD, and used for advanced post processing and learning. So you can easily share measurements, test details and knowledge within your company.


You measure, you control, you learn.



Empower your business by managing, storing and sharing your data safely and effectively.

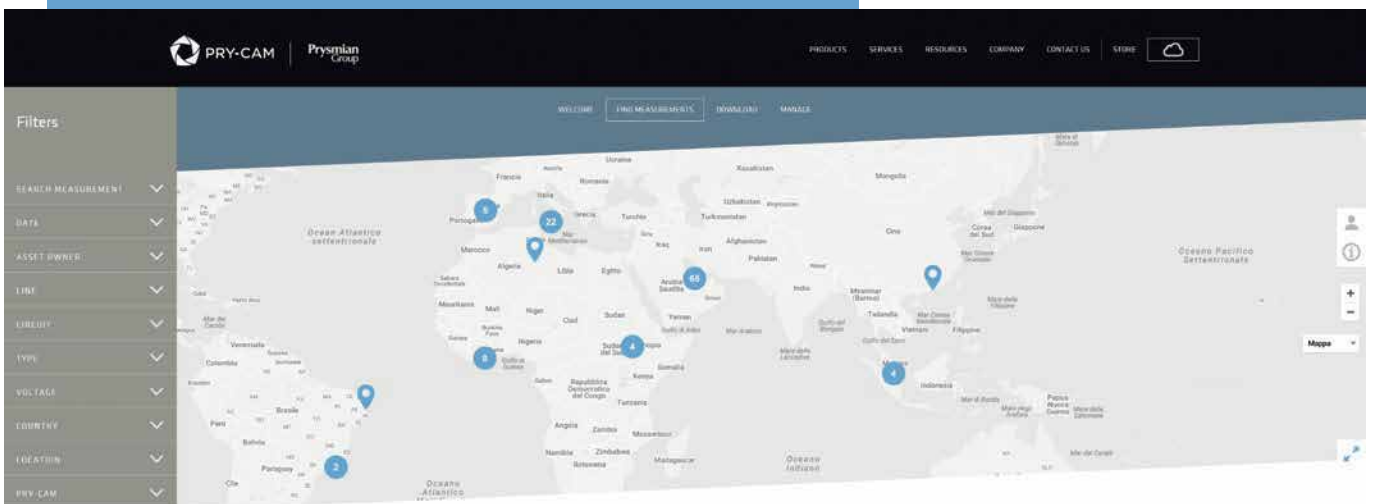

KEY FEATURES

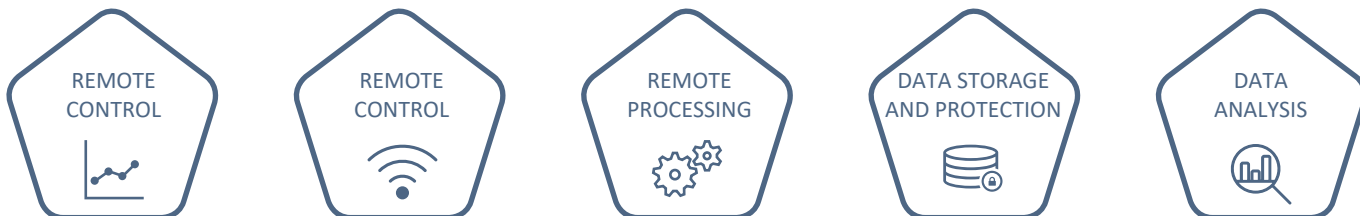

**PD PATTERN**

05.10.2016 5:45:25

ALL PD PATTERN OF THIS PHASE

**DIAGNOSTIC DATA**

General parameters

qMax 95% [mV]	N	Nw	φMin*	Δφ*
383.8	25000	8.07	0.0	360.0


Discharges parameters

Pulses	N	qMax 95% [mV]	qMin 95% [mV]	qMean [mV]	φMax*	φMin*	φMean*
Positive	22222	325.3	106.0	160.2	360.0	0.0	170.9
Negative	2778	376.5	149.9	245.1	300.9	0.0	159.4

**LOCATION**

GPS: 22.379957, 114.137156


ASK AN EXPERT ADVICE

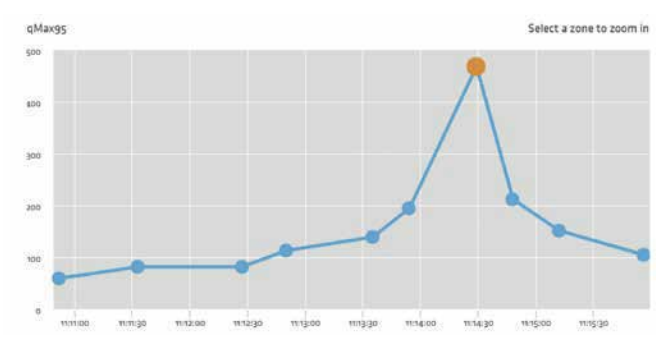

● **TP** SELECT

Line: trending - Circuit:1 - Phase: N/A  
 Palermo, Italy  
 Cable - 0 kW 6/10

VIEW PD PATTERN

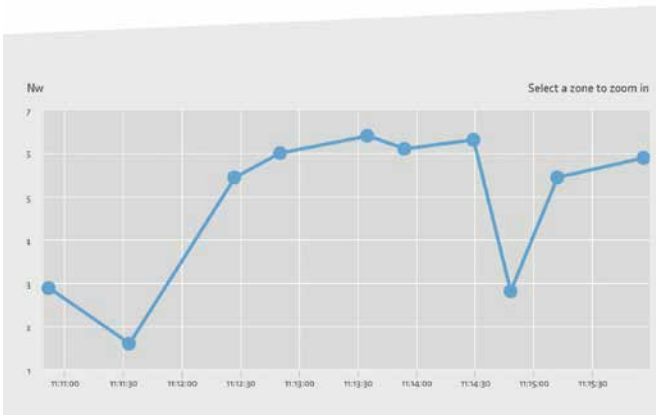

PRY-CAM CLOUD optionally allows advanced processing based on the proprietary PRY-CAM BRAIN™ algorithm for automatic diagnosis of PD measurements. In addition, as an option, you can have virtual access to Prysmian PD Experts with remote diagnosis within 24 hours.

The analytics functions allows you to evaluate what impact the PRY-CAM technologies have on your electrical assets over time.

# PRY-CAM PORTABLE






## PORTABLE, WIRELESS AND ONLINE PARTIAL DISCHARGE (PD) MEASUREMENT

### HOW IT WORKS

PRY-CAM PORTABLE is an integrated portable instrument for the automatic acquisition, processing and classification of pulse signals generated by PD phenomena occurring in insulating materials of medium and high-voltage electrical systems and equipment, such as transformers, electrical machines, cables systems and switchgear.

PRY-CAM PORTABLE allows you to perform accurate diagnostic measurements and continuous monitoring, without the worry of service interruptions.

### KEY FEATURES

-  Portable
-  Wireless technology
-  Ultra-wide bandwidth differential field sensor with 0.5 pC sensitivity
-  Accurate acquisition of PD and AC sync
-  No galvanic connection for maximum safety



### ACCURATE ACQUISITION SYSTEM

250 mega samples per second

100 MHz bandwidth



PATENTED WIRELESS  
 SENSOR WITH TWO OUTPUTS

PD pattern with waveform and  
 frequency spectrum of every PD pulse

AC synchronisation with supply voltage





## TECHNICAL SPECIFICATIONS

### Sensor type

Electromagnetic, based on a patented Ultra Wide Band antenna, also providing AC synch signal

### Bandwidth

100 MHz

### PD sensitivity

Down to 1 pC

### Synch frequency

From 10 Hz to 1 kHz

### Sampling frequency

200 MS/s

### Processing

Real-time filtering capabilities, ultra-precise time stamping (\*10 ns)

### Interfaces

Wireless 802.11 b/g (WiFi)

AC external synch

Wireless RF interface @ 868 MHz

### Internal battery

Li-Po 7.4 V, 2200 mAh.

Autonomy approx. 6 hours

### Working Temperature

From -25°C to 70°C

### Weight

400g

### Dimensions

160 mm x 120 mm x 130 mm (L x W x H)

### Case

Rugged ABS plastic with IP67 protection rating

# ONE INSTRUMENT AND ONE APP. ALL YOUR NEEDS COVERED.

SEAMLESSLY MOVE BETWEEN BASIC, ADVANCED AND PREMIUM OPERATING MODES DEPENDING ON YOUR INFORMATION NEEDS AND PD EXPERTISE

3 OPERATING MODES. DISCOVER THE RIGHT ONE FOR YOU.

		RECOMMENDED FOR MV	RECOMMENDED FOR HV
BASIC Free use	Your PRY-CAM PORTABLE can be used as a reliable PD surveyor with traffic light and simplified PD pattern	✓	
ADVANCED Pay-per-use	Provides you with the PD pattern for simple diagnosis only	✓	✓
PREMIUM Pay-per-use	Provides you with the complete PD pattern, including waveforms and frequency spectrum, for any single PD pulse	✓	✓

You can temporarily upgrade from BASIC to ADVANCED or PREMIUM modes for more detailed diagnosis as and when you need it.

## DATA MANAGEMENT

Every single PD measurement can be saved alongside other useful details, such as pictures, recorded messages, GPS coordinates, notes and tags.



**WHY PRY-CAM PORTABLE IS BETTER FOR YOUR BUSINESS**

- 100% of critical defects detected on HV and MV
- Up to 80% of faults avoided
- 70% measurement time saved against traditional technologies
- Up to 5x higher sensitivity on small defects

**APPLICATIONS**

- Suitable for any electrical equipment from 3 kV to 600 kV
- Suitable for AC, DC and VLF
- Suitable for cable systems, transformers, switchgear and electrical machines

**OPTIONAL EXTRAS**

**PRY-CAM BACKPACK KIT**

Includes one backpack, one telescopic stick, one tripod, one strap and one car charger, giving you everything you need, even in the most difficult situations.



# PRY-CAM GRIDS







## THE BEST CHOICE FOR PERMANENT MONITORING OF YOUR STRATEGIC ASSETS

### HOW IT WORKS

PRY-CAM GRIDS is a high-performance acquisition system for automatic acquisition, processing and classification of PD signals and spot temperature.

It's designed specifically for remote monitoring of three-phase strategic assets and can be installed during normal operation.

### KEY FEATURES

-  No galvanic connection, allows installation during normal operation
-  Suitable for PRY-CAM WINGS sensors for PD and local temperature
-  PD pulses waveform and frequency spectrum acquired up to 50 MHz
-  Advanced warning and alarms based on exclusive PRY-CAM BRAIN™ algorithm for automatic diagnosis
-  Several data connectivity modes for remote communication and access
-  Accurate PD pattern acquisition

### WHY PRY-CAM GRIDS IS BETTER FOR YOUR BUSINESS

- Only 5 W of power consumption suitable for energy harvester, batteries, PV panels, micro wind turbines, etc.
- Warnings and alarms based on real risks, not on the misleading PD amplitude
- Reliable remote diagnosis

### NUMBERS

- More than 150 permanent systems in operation around the world
- More than 200,000 PD measurements performed by permanent installations
- 100% of defects identified



**ACCURATE ACQUISITION SYSTEM**  
 200 mega samples per second  
 50 MHz bandwidth

**PATENTED PRY-CAM BRAIN™ ALGORITHM**

For automatic diagnosis and advanced alarms

PD pattern, with waveform and frequency spectrum of every PD pulse

AC synchronisation with supply voltage

### TECHNICAL SPECIFICATIONS

**Input – PD & AC synch channels**  
 3 x 100 Ohm diff., 1.5 Vpp (overvoltage protected) + 1 x 100 Ohm diff. (optional)

**Processor**  
 Based on ARM™ architecture

**Sampling frequency**  
 200 MS/s

**Bandwidth**  
 50 MHz

**Processing**  
 Real-time filtering, ultra-precise timestamp (5 ns)

**Interfaces**  
 Ethernet or wireless 802.11 b/g (via USB adapter)

**Modem**  
 GSM/UMTS modem (optional)

**Local storage**  
 Solid State Technology, up to 64 GB

**Working modes**  
 Stand alone or instrument or continuous monitoring

**Power supply**  
 110-230 V, 50-60 Hz AC / 12 V DC

**Power consumption**  
 < 5 W

**Working temperature**  
 From -50°C to 90°C

**Weight**  
 2.5 kg

**Dimensions**  
 250 x 210 x 100 mm (L x W x H)

**Case**  
 Aluminium with IP68 protection rating

**Mounting**  
 Flange/screw, orientation horizontal/vertical






# PRY-CAM WINGS SENSOR

THE BEST CHOICE FOR FIXED MEASUREMENT OF  
PARTIAL DISCHARGE AND LOCAL TEMPERATURE

## HOW IT WORKS

PRY-CAM WINGS Sensor is a patented sensor for partial discharge (PD) and local temperature that can easily be fixed to any electrical components without service interruption.

## KEY FEATURES

-  Easy to fix on the cable close to test equipment
-  No galvanic connection allows installation during normal operation
-  Accurate PD acquisition with 50 MHz bandwidth
-  Local temperature measurement at contact point
-  Suitable for analogue and digital inputs


## WHY PRY-CAM WINGS IS BETTER FOR YOUR BUSINESS

- Installation without service interruption
- Active sensor for compensation of non-linearity
- 50 MHz bandwidth
- Suitable for remote monitoring of PD and temperature

## NUMBERS

- More than 2,500 sensors installed worldwide

Patented sensors for PDs, local temperature at contact point and AC synchronization with supply voltage

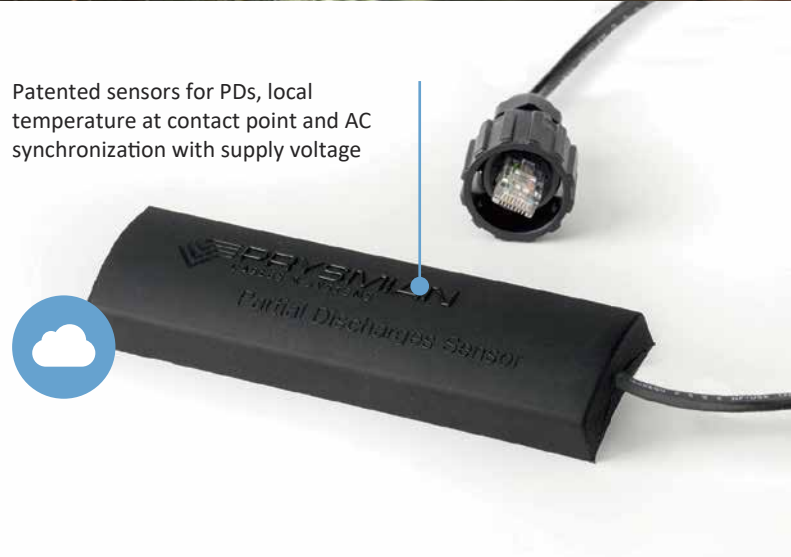

## TECHNICAL SPECIFICATIONS

<b>Sensor type</b> Electromagnetic active sensor also providing AC synch signal. Flat and flexible type	<b>Synch sensitivity</b> Down to about 150 VAC (at 10 cm)
<b>Sensor cable</b> 10 m long ethernet 5E category cable, IP67	<b>Synch frequency</b> From 10 Hz to 1 kHz
<b>Connector</b> RJ45 connector with IP67 cap	<b>Working temperature</b> From -50°C to 90°C
<b>Bandwidth</b> 0.1-50 MHz (higher on request)	<b>Weight</b> 50 grams
<b>PD sensitivity</b> Down to 1 pC	<b>Sensor dimensions</b> 160 x 40 x 15 mm (L x W x H)
	<b>Case</b> Silicon rubber, IP67 protection

# PRY-CAM DLOG







EASILY MONITOR THE KEY PARAMETERS OF YOUR STRATEGIC ASSETS

## HOW IT WORKS

PRY-CAM DLOG is a high-performance system for automatic acquisition and processing of key asset parameters, such as temperature, pressure, currents, voltage, flooding, intrusion, smoke, and much more.

It works with commercial sensors and can be installed during normal operation.

## KEY FEATURES

-  No galvanic connection, allows installation during normal operation
-  Suitable for analogue and digital inputs
-  Advanced alarm functions
-  Can be used in complex monitoring system or as a stand-alone unit accessible from remote
-  Accessible from remote as a router
-  Suitable for commercial sensors

## WHY PRY-CAM DLOG IS BETTER FOR YOUR BUSINESS

- Installation without service interruption.
- Only 5 W of power consumption suitable for energy harvester, batteries, PV panels, micro wind turbines, etc.
- Continuous tracking of key parameters
- Advanced alarm functions

## NUMBERS

- More than 40 permanent systems commissioned around the world 100% of critical conditions identified



Up to 4 analogue or digital inputs  
 Up to 4 customised digital outputs

Internal processing and alarm generation  
 Customised sampling frequency from 1 second to 24 hours

## TECHNICAL SPECIFICATIONS

Input channel number  
 Up to 4

Supported sensors  
 PT100 DIN IEC 751 (4 wires), Voltage, Current – other 4-20 mA sensors type on request

Temperature accuracy with PT100  
 0.1°C (limited by sensor)

Resolution  
 16 bit

Sampling frequency  
 1 second to 24 hours

Internal memory  
 4-16 GB (SSD)

Interface  
 USB 2.0 Host (multi-class support)

Network  
 Ethernet LAN: WiFi, GPRS/UMTS modem (external)

Working temperature  
 From -25°C to 50°C

Weight  
 300 grams

Dimensions  
 130 x 100 x 70 mm (L x W x H)

Case  
 Rugged aluminium

Power supply  
 12 V DC, 200 mA, 2.5 W  
 AC/DC power adapter  
 110-240 V AC, 50-60 Hz (optional)




## DIAGNOSTICS AND ASSET INTEGRITY SERVICES

Hundreds of failures have already been prevented by Prysmian PD experts using online condition assessment and defect localisation.

We believe that innovation and knowledge must be shared to achieve the highest level of asset management and condition assessment. For this reason we can provide you with two types of PRY-CAM training, BASIC and ADVANCED .

For more information, please don't hesitate to contact a member of the team.

## OUR WORLDWIDE FIGURES

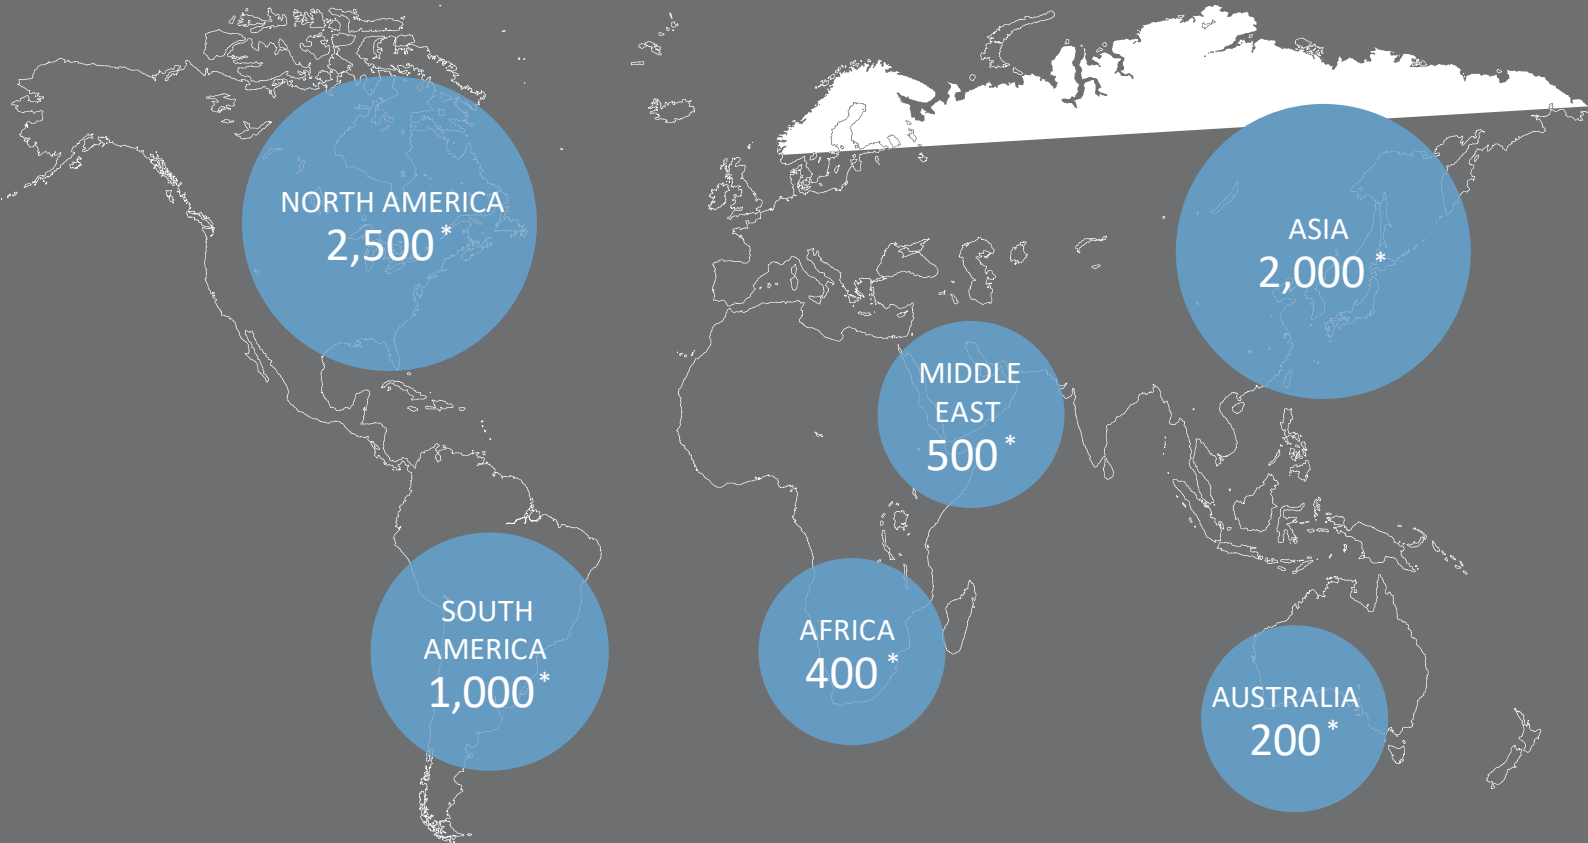

Number of spot PD measurements  
**30,000+**

Number of recurring customers  
**40+**

Number of permanently monitored test points  
**400+**

PD diagnosis reliability rate  
**100%**



日燭國際事業股份有限公司  
*JD Auspice Co., Ltd.*

