




# D1-50/275-2MV-R

Surge arrester for low-voltage power supply system protection against surges at the boundaries from lightning protection zone 0B-1 and higher.

## Terminal Block Modules series

- Class II (C) arrester in according with IEC61643-11.
- Two part design consisting of base and plug-in module.
- High energy MOV (Metal Oxide Varistor) inside.
- Reliable supervision due to disconnection device.
- Fault indication by red indication flag in window.
- Fast response.
- With remote alarm terminal.

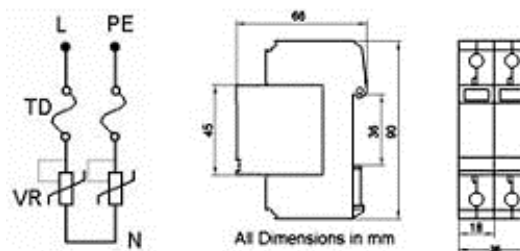

### Technical Data

Type		D1-50/275-2MV-R
		275
In accordance with		IEC61643 -11, UL1449 3rd
Category IEC/VDE		Class II/C
Max. continuous operating voltage (AC/DC)		275/300
Nominal discharge current(8/20) In	L-N	20KA
	N-PE	20KA
Max. discharge current(8/20) I <sub>max</sub>	L-N	50KA
	N-PE	50KA
Voltage protection level @In		1.3kV
Voltage protection rating @6KV/3KA		1.0KV
Response time		≤25 ns
Backup fuse(only required if not already provided in mains)		125A gL/gG
Operating temperature range		- 40°C ~ + 80°C
Cross-section of connection wire		Single-strand 35mm <sup>2</sup> ; multi-strand 25mm <sup>2</sup>
Mounting		35mm DIN-rail in accordance with EN 50022/DIN46277-3
Enclosure material		thermoplastic; extinguishing degree UL94 V-0
Degree of protection		IP20
Installation width		2 modules, DIN 43880
Thermal disconnecter		Internal green – normal red - failure
Remote alarm contact		Yes
Additional data for Remote Alarm Contacts		
Remote alarm contact type		floating changeover contact
Switching capability UN/IN		AC: 250V/0.5A DC: 250V/0.1A; 125V/0.2A; 75V/0.5A
Cross-section of connection wire		Max. 1.5mm <sup>2</sup>

Note: Subject to change without any notice.