

Switch disconnector for solar application according to IEC 60947-1&3 by Dekra (KEMA) and CCC (CQC)






Terminals Scheme									
Layer	Fron	t Side	Symbol	Rear Side		On Positions			
No.	Left	Right	Зуппоп	Left	Right	1	2	3	4
							L	L	
						_	H	H	
						_	H	H	
							L	L	
							H	H	
							H	H	
							H	H	
5	+2			+2		Х			
4	+2	-2		+2	-2	X			
3	-1	-2		-1	-2	X			
2	-1	+1		-1	+1	X			
1		71	empty		71	^			
1	Conta	ctc are	made in ">	(" marl	rod nor	itio			

Contacts are made in "X" marked position.

works tool date.	Symbols for interconnection: [
Technical data	-,	erit		Unit	
rated operational voltage (DC poles)	Ue		1500	V dc	
rated operational current (DC poles)	le		20	A do	
rated operational voltage (second rating DC poles, if requested)	Ue		1000	V dc	
rated operational current (second rating DC poles, if requested)	le		50	A do	
method of mounting	both bottom and	single hole moun			
number of DC poles			4		
utilization category DC	DC-21B				
actuator	standard black [A	.]			
positions	OFF at 12 hr, ON	at 3 hr [E]			
rated impulse withstand voltage	Uimp		8	kV	
insulation voltage	Ui		1500	٧	
rated thermal current uninterrupted duty	lu		50	Α	
rated short-time withstand current (1s)	lcw		750	Α	
rated short-circuit making capacity	lcm		1.4	kA	
rated conditional short-circuit current			5	kA	
method of operation	independent mar	nual operation			
minimum required dimensions of enclosures L x W x H* (on DIN-rail H = +2mi	m) {space envelope}	12	4 x 47 x 84.6	mm	
* see the drawing for the height of the switch. The number of layers N is:	,,,,		5		
knob operation force		max.	1.4	Nm	
tightening torque terminal screws M4 , min max.		1.5	1.7	Nm	
tightening torque panel mounting nut, min max.		2.0	2.5	Nm	
tightening torque M3 screw in the standard black knob, min max.		0.5	0.7	Nm	
ambient temperature allowed between			- 40 to + 80	°C	
storage temperature allowed between			- 40 to + 80	°C.	
maximum relative humidity, without condensation at 20°C			90	%	
pollution degree			2		
IP rating terminals			IP20		
IP rating gland of the shaft in case of single hole panel mounting			IP65		
rated operational voltage (AC poles)	Ue			V ac	
rated operational current (AC poles)	le			A ac	
number of AC poles (for general use)				,, a	
minimum required fine wire cross-section: IEC60947-1, table 9				mm	
auxiliary contact(s), AC15			No auxilia		
, , , ,			INO duxilla	y cont	
auxiliary contact ratings			254		
weight			254	g	
accessories:	-				

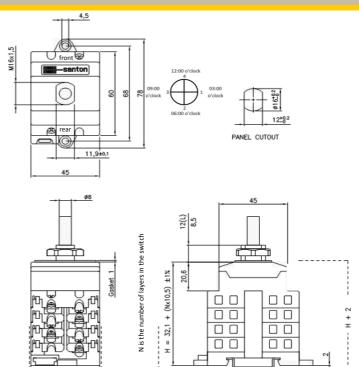

Mounting instructions

In the application all ratings according to the datasheet have to be respected. After mounting, the wiring must be checked and the switch must operate smoothly. When building the switch in an enclosure, the space envelope must be respected according to the applicable standards.

124

Maintenance

The X type switches are designed for a very long life but it is advised to do some simple yearly maintenance.

- Check the installation for signs of overload or overheating. The terminals may not exceed the limit of 85 °C under full load.
- By operating the switch a few times (5x) the contacts will clean themselves and the switch will have a longer life.

Connection details

Description	Symbol	Values			Unit	
Rated operational current (DC poles)	le	20	50			A dc
Required fine wire cross-section (minimal): IEC60947-1, table 9	А	4	2x6			mm²
max power dissipation	P	0.0	0.0			W

The terminals, without interconnection can take copper wires up to 6 mm2.

The recommended Spade Tongue Terminals may have a maximum width of 9 mm.

For CSA and UL applications, registered Spade Tongue Terminals must be used. $\label{eq:csa}$

The registration numbers are UL: E13288 and CSA: LR7189 (for instance type 165015 from Tyco).

Registerd Spade Tongue Terminals

Recommend Manufacturer	Type number	Wire size (AWG)	Wire size (mm²)	Color
JST	FVD2-YS4A	AWG 16 – AWG 14	1,0 - 2,5 mm ²	Blue
TE connectivity	C-165012	AWG 16 – AWG 14	1,0 - 2,5 mm ²	Blue
Vogt	3635c	AWG 16 – AWG 14	1,5 – 2,5 mm²	Blue
TE connectivity	C-165015	AWG 12 - AWG 10	3,0 - 6,0 mm²	Yellow
Vogt	3652c / 3653c	AWG 12 - AWG 10	3,0 - 6,0 mm²	Yellow
Santon (JST)	52A1256.35	AWG 8 - AWG 10	10,5mm²-16mm² *1	*2

*1 16mm² only with fine stranded wire or two 6mm² is also possible

*2 Optional: A yellow finger safe sleeve for the Spade Tongue Terminal (Santon 52A1256.35) can be ordered under item number 52A1564.00

Dimensions, specifications and data shown are be subject to change without notice.

Superior Switch Solutions

Superior Switch Solutions