





Data Sheet Santon X-Type switch X100.36D8-A


Switch disconnecter for solar application according to IEC 60947-3 by KEMA

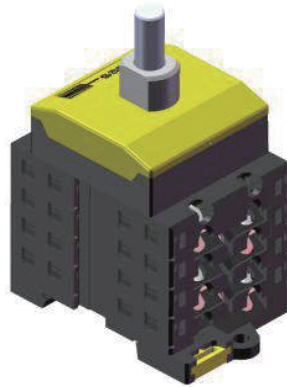

Terminals Scheme									
Layer No.	Front Side		Symbol	Rear Side		On Positions			
	Left	Right		Left	Right	1	2	3	4
16									
15									
14									
13				+4			X	X	
12					+4		X	X	
11	-4			-4			X	X	
10		-3			-3		X	X	
9				+3			X	X	
8					+3		X	X	
7				+2			X	X	
6					+2		X	X	
5	-2			-2			X	X	
4		-1			-1		X	X	
3				+1			X	X	
2					+1		X	X	
1			empty						

Contacts are made in "X" marked position.
Symbols for interconnection: [

Technical data	Symbol	Merit	Unit
nominal voltage (DC poles)	Ue		1000 V dc
nominal current (DC poles)	Ie		36 A dc
nominal voltage (second rating DC poles, if requested)	Ue		0 V dc
nominal current (second rating DC poles, if requested)	Ie		0 A dc
method of mounting		both bottom and single hole mounting [D]	
number of DC poles			8
utilization category DC	DC-21B		
actuator		standard black [A]	
positions		OFF at 3 hr, ON at 6 hr, OFF at 9 hr, ON at 12 hr	
rated impulse withstand voltage	Uimp		8 kV
insulation voltage	Ui		1000 V
rated thermal current uninterrupted duty	Iu		36 A
rated short-time withstand current (1s)	Icw		750 A
rated short-circuit making capacity	Icm		1,4 kA
rated conditional short-circuit current			5 kA
max power dissipation			21,8 W
method of operation		independent manual operation	
minimum required dimensions of enclosures L x W x H*			124 x 47 x 168,5 mm
* see the drawing for the height of the switch. The number of layers N is:			13
Shaft length			mm
Enclosure depth from inside bottom to outside top, required for the switch and knob			197 mm
tightening torque terminal screws M4 , min. - max.		1,5	1,7 Nm
tightening torque M3 screw in the standard black knob, min. - max.		2,0	2,5 Nm
tightening torque for the nut on the single hole mounting knob, min. - max.		0.5	0,7 Nm
minimum required fine wire cross-section: IEC60947-1, table 9			6 mm ²
ambient temperature allowed between			- 20 to + 70 °C
storage temperature allowed between			- 40 to + 80 °C
maximum relative humidity, without condensation at 20°C			90 %
pollution degree			2
IP rating terminals			IP20
IP rating gland of the shaft in case of single hole panel mounting			
nominal voltage (AC poles)	Ue		V ac
nominal current (AC poles)	Ie		A ac
number of AC poles			
auxiliary contact(s), AC15			No auxiliary contact
weight			522 g
accessories:	-		
	-		

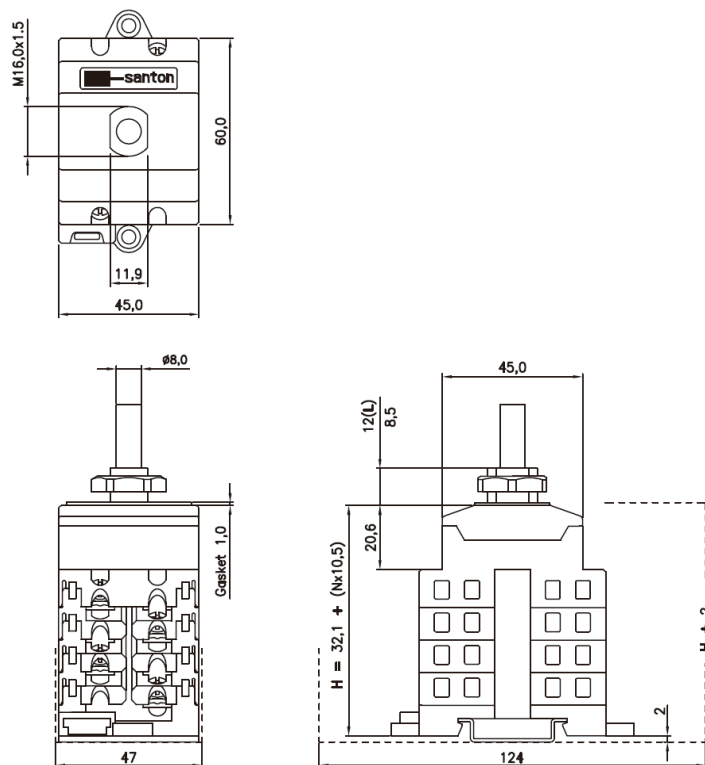

Mounting instructions


In the application all ratings have to be respected. When building the switch in an enclosure, the space envelope must be respected according to the applicable standards. The terminals, without interconnection can take copper wires up to 6 mm². The recommended Spade Tongue Terminals may have a maximum width of 9 mm. For CSA and UL applications, registered Spade Tongue Terminals must be used. The registration numbers are UL: E13288 and CSA: LR7189 (for instance type 165015 from Tyco). After mounting, the wiring must be checked and the switch must operate smoothly.

Maintenance


The X type switches are designed for a very long life but it is advised to do some simple yearly maintenance.

- Check the installation for signs of overload or overheating. The terminals may not exceed the limit of 85°C under full load.
- By operating the switch a few times (5x) the contacts will clean themselves and the switch will have a longer life.


A type knob




D type knob



B type knob



O type knob



Dimensions, specifications and data shown are be subject to change without notice.